



△△ SPECIFICATION


Current Rating:5A AC/DC
 Voltage Raing:300V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+90°C
 Material:PA66(UL94V-2)
 RoHS Compliant

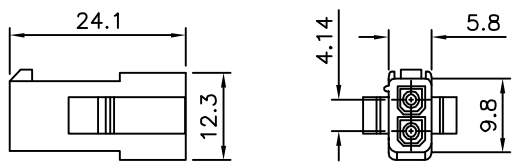


△ 1X02 Pin

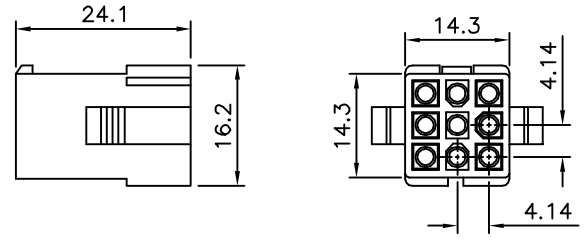


△ 3X03 Pin

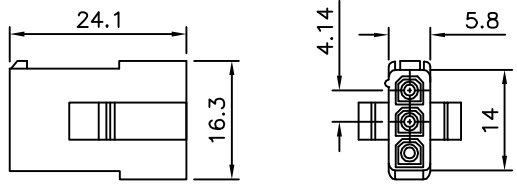


△ 1X03 Pin

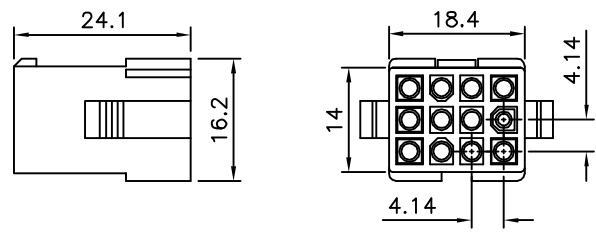


△△ 3X04 Pin

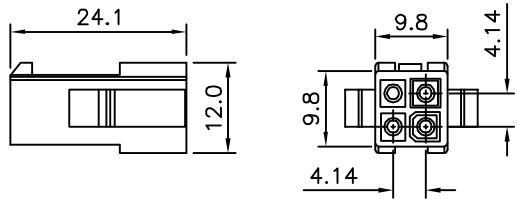

△ 2X02 Pin

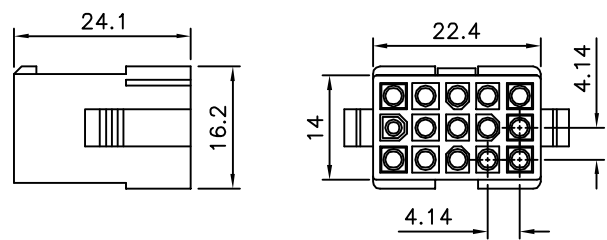

△△ 3X05 Pin

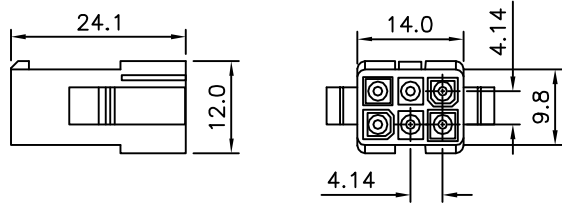

△ 2X03 Pin

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.3 △.X ±0.3 △.XX ±0.3
11561		EMILY		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT
NONE		SONG		mm
REV.	A2			

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	09/18/2012
△A1		Modify Data	HZF	11/10/2011
△A0		NEW RELEASE		