



△△ SPECIFICATION


Current Rating:5A AC/DC
 Voltage Raing:300V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+90°C
 Material:PA66(UL94V-2)
 RoHS Compliant

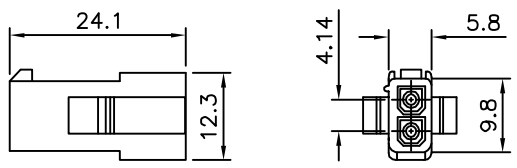


△ 1X02 Pin

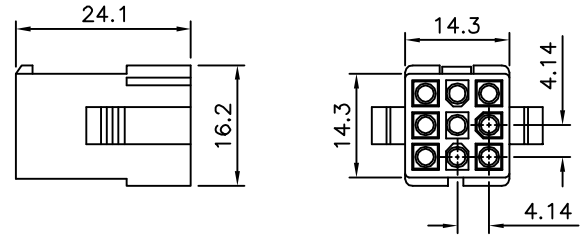


△ 3X03 Pin

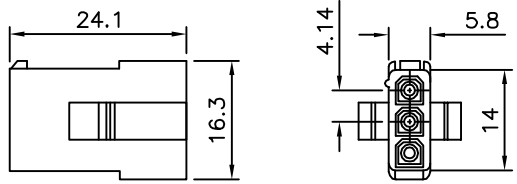


△ 1X03 Pin

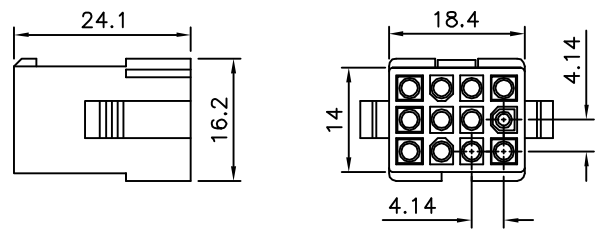


△△ 3X04 Pin

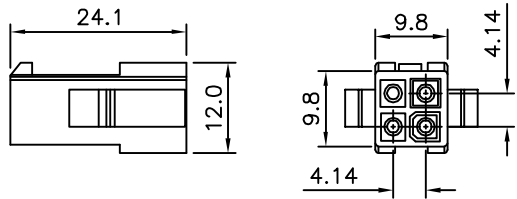

△ 2X02 Pin

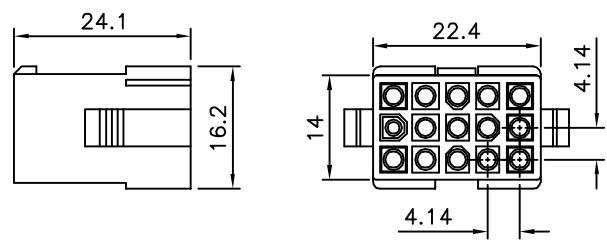

△△ 3X05 Pin

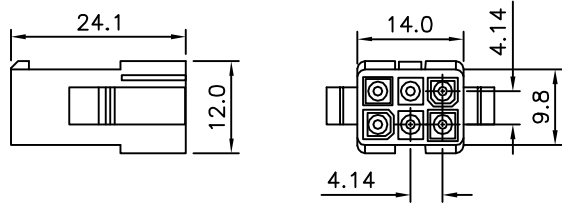

△ 2X03 Pin

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|----|----------------|--|-----------------------------------------------------------------------------------|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.3 △ .X ±0.3 △ .XX ±0.3 |
| 11563 | | EMILY | | |
| | | CHECKED BY HZF | | |
| SCALE | | DRAWING BY | | UNIT |
| NONE | | SONG | | mm |
| REV. | A2 | | | |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A2 | | Modify Data | HZF | 09/18/2012 |
| △ A1 | | Modify Data | HZF | 11/10/2011 |
| △ A0 | | NEW RELEASE | | |