




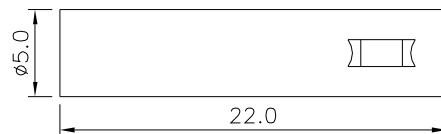


SPECIFICATION



Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C To +85°C
Insulator:PA66(UL94V-2)
RoHS Compliant




Singel RowX01PIN

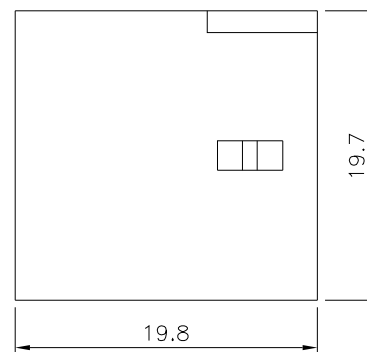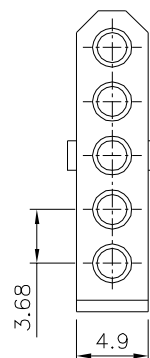



Singel RowX05PIN

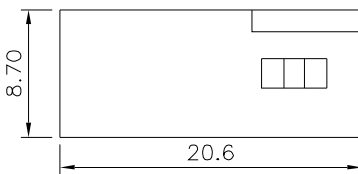



Singel RowX02PIN





Dual RowX02PIN

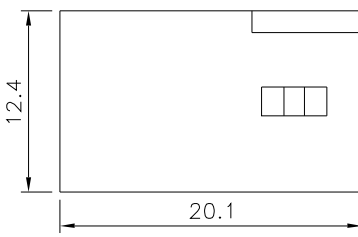



Singel RowX03PIN

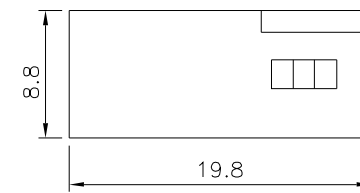



Dual RowX03PIN

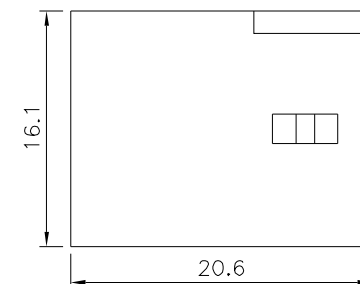



Triple RowX04PIN

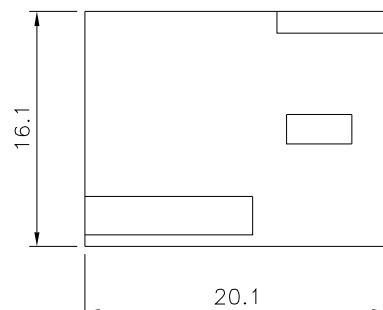

Singel RowX04PIN

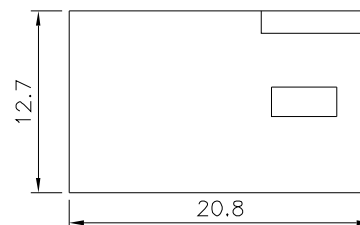

Triple RowX03PIN

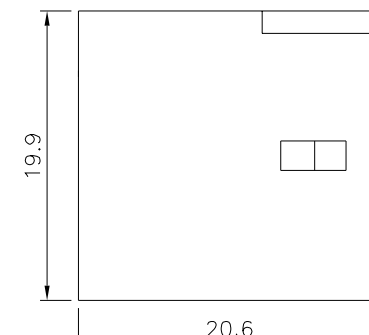

Triple RowX05PIN

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11708

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30
.XX ±0.30

UNIT

mm



SCALE

NONE

REV.

A2

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	05/11/2018
A1		Modify Data	HZF	07/31/2009
A0		NEW RELEASE	MEI	