

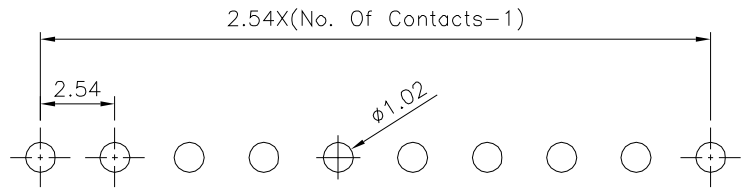
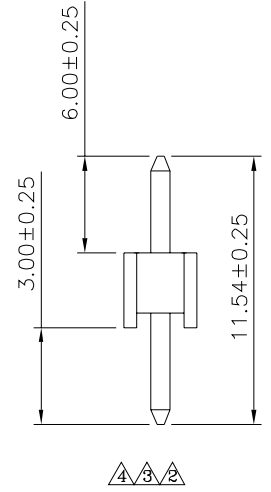


- △1 SPECIFICATION**
 Current:3A
 Operation Temperature: -55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
△4 Withstanding Voltage:1000V AC/Mimute
 Housing:PBT(UL94V-0),Black
△3 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

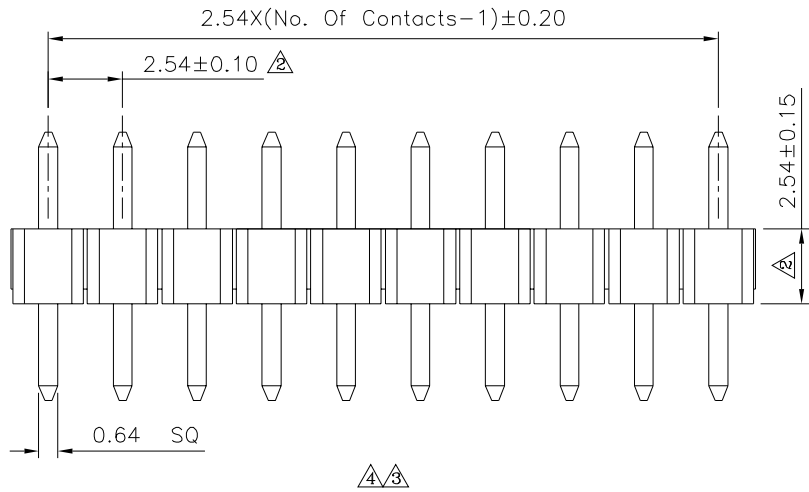

△4 Recommended P.C.B. Layout

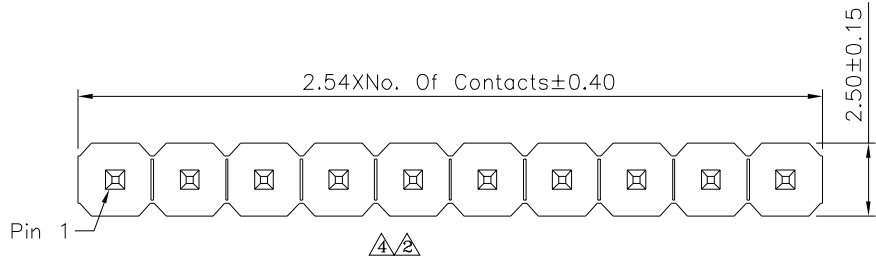

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 XXX ±0.05	△4 A4	Modify Data	HZF	08/15/2019
11716		MEI			△3 A3	Modify Data	HZF	04/03/2014
		CHECKED BY			△2 A2	Modify Data	HZF	11/01/2010
SCALE		REV.		△1 A1	Modify Data	SHIN	04/26/2007	
		NONE		A4	△0 A0	NEW RELEASE	SHIN	03/06/2006
UNIT		REV.		NO. REV.	REVISIONS	CHK	DATE	
mm		A4						