


△ SPECIFICATION

Current Rating:3A AC/DC
 Voltage Rating:350V AC/DC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Housing:PA66(UL94V-0)
 RoHS Compliant

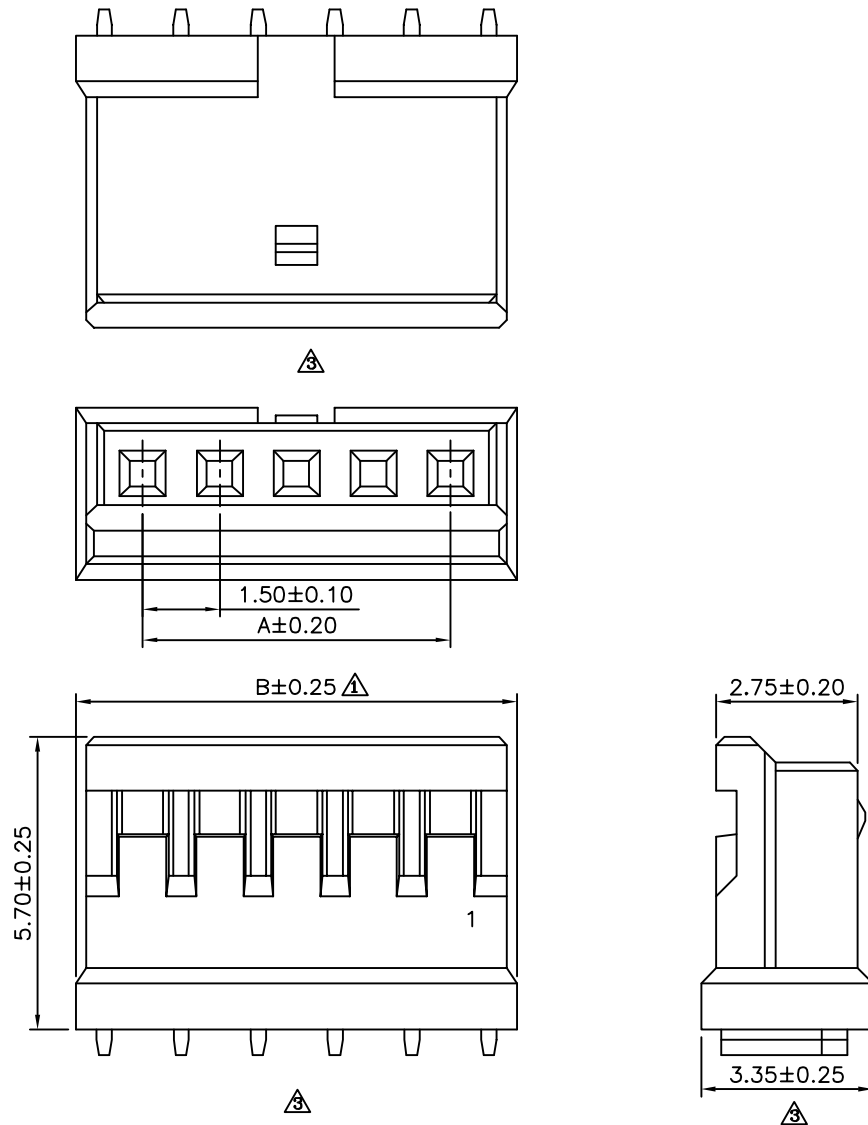

| Pin | A | B |
|-----|-------|-------|
| 2 | 1.50 | 4.10 |
| 3 | 3.00 | 5.60 |
| 4 | 4.50 | 7.10 |
| 5 | 6.00 | 8.60 |
| 6 | 7.50 | 10.10 |
| 7 | 9.00 | 11.60 |
| 8 | 10.50 | 13.10 |
| 9 | 12.00 | 14.60 |
| 10 | 13.50 | 16.10 |
| 11 | 15.00 | 17.60 |
| 12 | 16.5 | 19.10 |
| 13 | 18.00 | 20.60 |
| 14 | 19.50 | 22.10 |
| 15 | 21.00 | 23.60 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11992

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ± 0.15
 .XX ± 0.05
 ANG. $\pm 1^\circ$

SCALE NONE

REV.

A3

UNIT mm



NO. REV.

REVISIONS

CHK

DATE

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-----|------------|
| △ A3 | | Modify Data | HZF | 03/02/2013 |
| △ A2 | | Modify Data | HZF | 02/01/2013 |
| △ A1 | | Modify Data | HZF | 08/06/2009 |
| △ A0 | | NEW RELEASE | HZF | 10/20/2008 |