


△ SPECIFICATION

Current Rating:3A AC/DC
 Voltage Rating:350V AC/DC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Housing:PA66(UL94V-0)
 RoHS Compliant

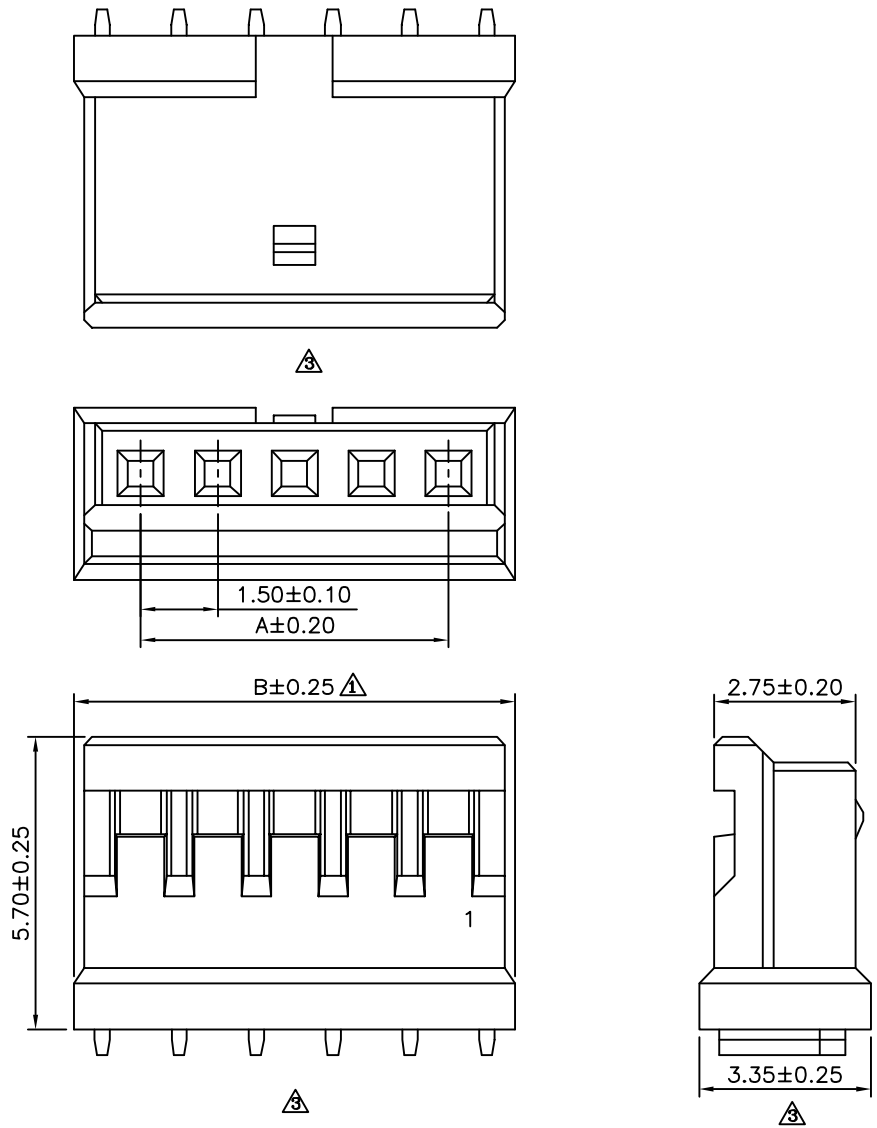

Pin	A	B
2	1.50	4.10
3	3.00	5.60
4	4.50	7.10
5	6.00	8.60
6	7.50	10.10
7	9.00	11.60
8	10.50	13.10
9	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.5	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 11994
 APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY GAO
 SCALE NONE REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.15
 .XX ±0.05
 ANG. ±1°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	03/02/2013
△ A2		Modify Data	HZF	02/01/2013
△ A1		Modify Data	HZF	08/06/2009
△ A0		NEW RELEASE	HZF	10/20/2008