




SPECIFICATION



Rated Current:1.0 Amp
 Rated Voltage:100V AC/DC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:500 Megaohms Min.
 Operation Temperature:-25°C~+85°C
 Terminal:Phosphor Bronze,Tin Plated
 Wire Range:AWG#24~#30
 Insulation O.D.:1.10mm Max.
 Thickness:0.15mm
 Q'ty/Reel:10000 PCS/Reel
 RoHS Compliant

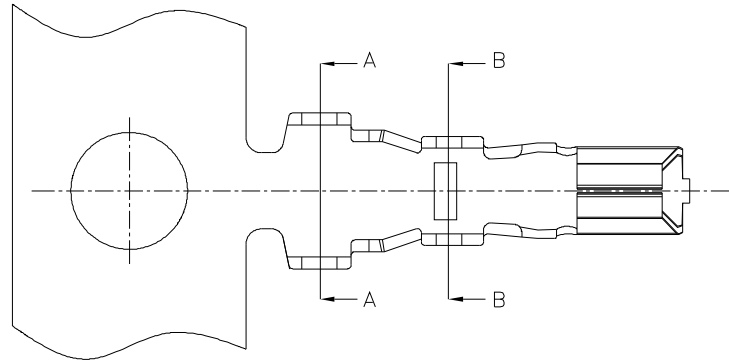

Section:A-A



Section:A-A

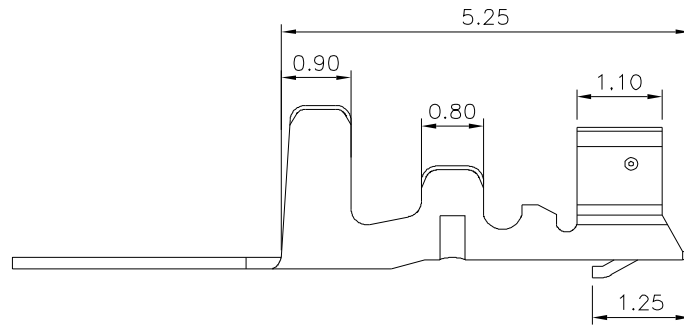

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12030

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25
 .XX ±0.20
 .XXX ±0.10
 ANG. ±3°

SCALE NONE

REV.

A0

UNIT mm



NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	09/29/2020
		REVISIONS		