

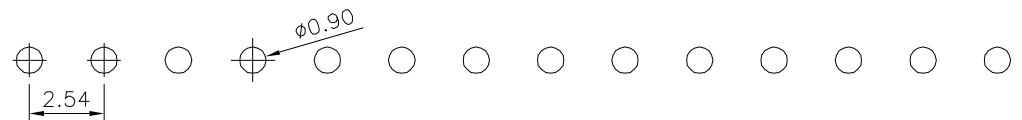

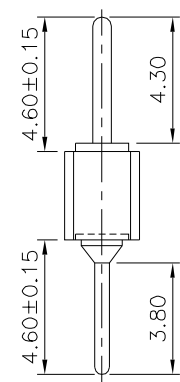


**SPECIFICATION**

Current Rating: 3 Amps/Contact Max.  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megaohms Min. At 100V  
 Operating Voltage: 60V AC/DC  
 Operating Temperature: -55°C~+105°C  
 Pin: Brass, Gold Flash Over All, Over Nickel  
 Insulator: PPS(UL94V-0), Black  
 RoHS Compliant

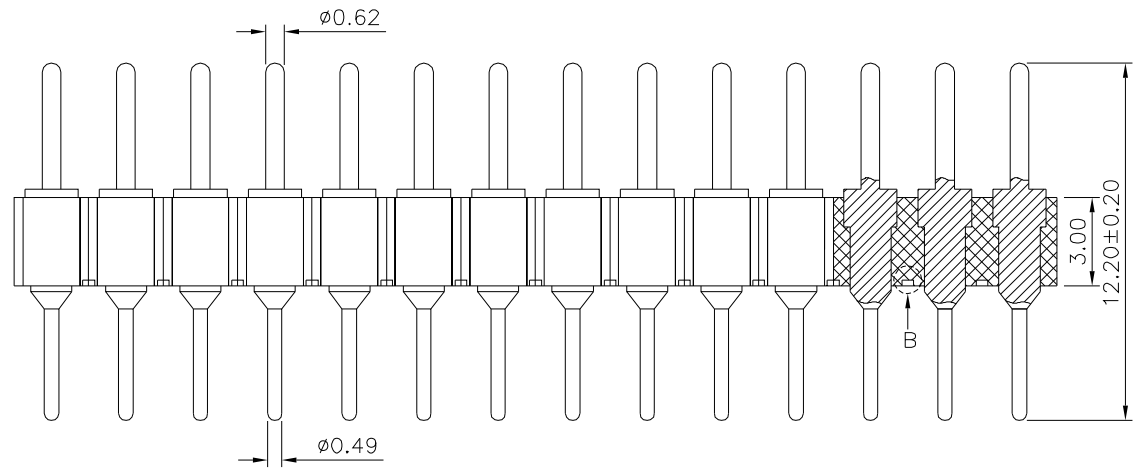

Recommended P.C.B. Layout

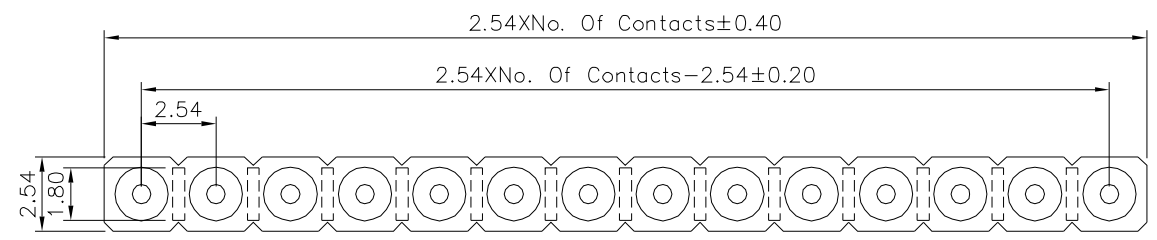

Detail: B

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 12102  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY HAO  
 REV. BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 XX ±0.30  
 XXX ±0.20  
 .XXX ±0.10  
 ANG. ±5°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ BO		NEW RELEASE	HZF	01/06/2016