| File No. | 432 | SHEET | 1/1 |
|---|---|---|---|

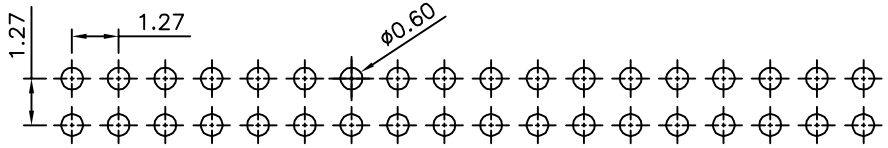


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

**SPECIFICATION**

Current Rating:1 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PA6T+30%G.F.(UL94V−0),Black
RoHS Compliant

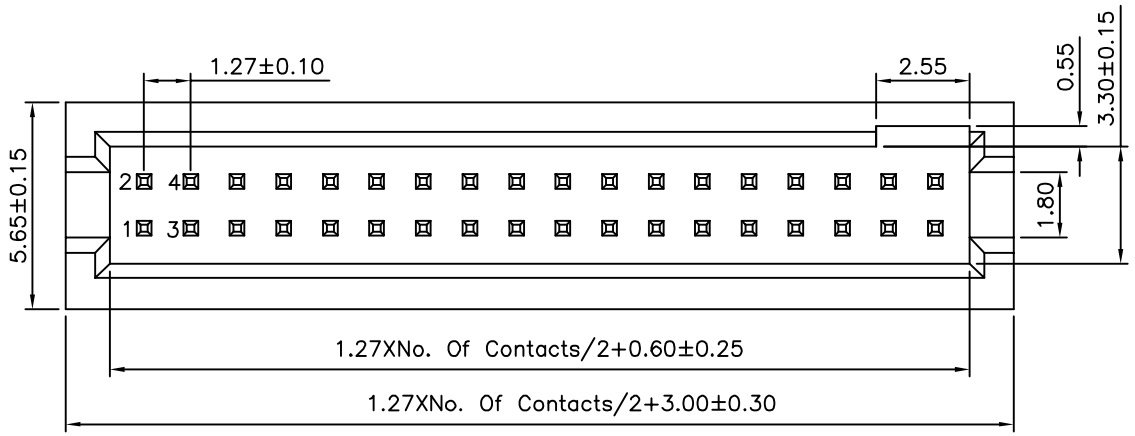


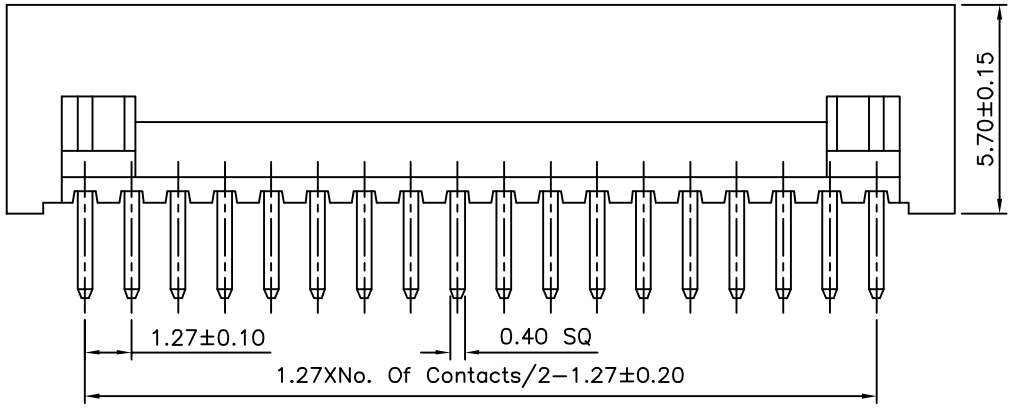


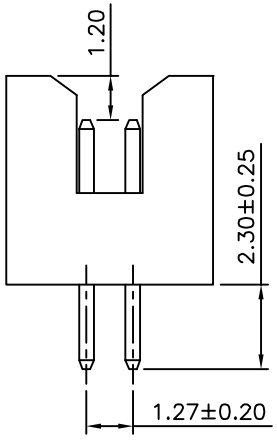


| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC. | | DRAWING No. 12201 | | APPROVED BY EMILY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3° | | | | | |
| | | | | CHECKED BY HZF | | | | | | | |
| | | | | DRAWING BY SONG | | | | | | | |
| | | SCALE | NONE | REV. | A0 | UNIT mm | | 0 | A0 | NEW RELEASE | HZF | 05/01/2011 |
| | | | | | | | | NO. | REV. | REVISIONS | CHK | DATE |