


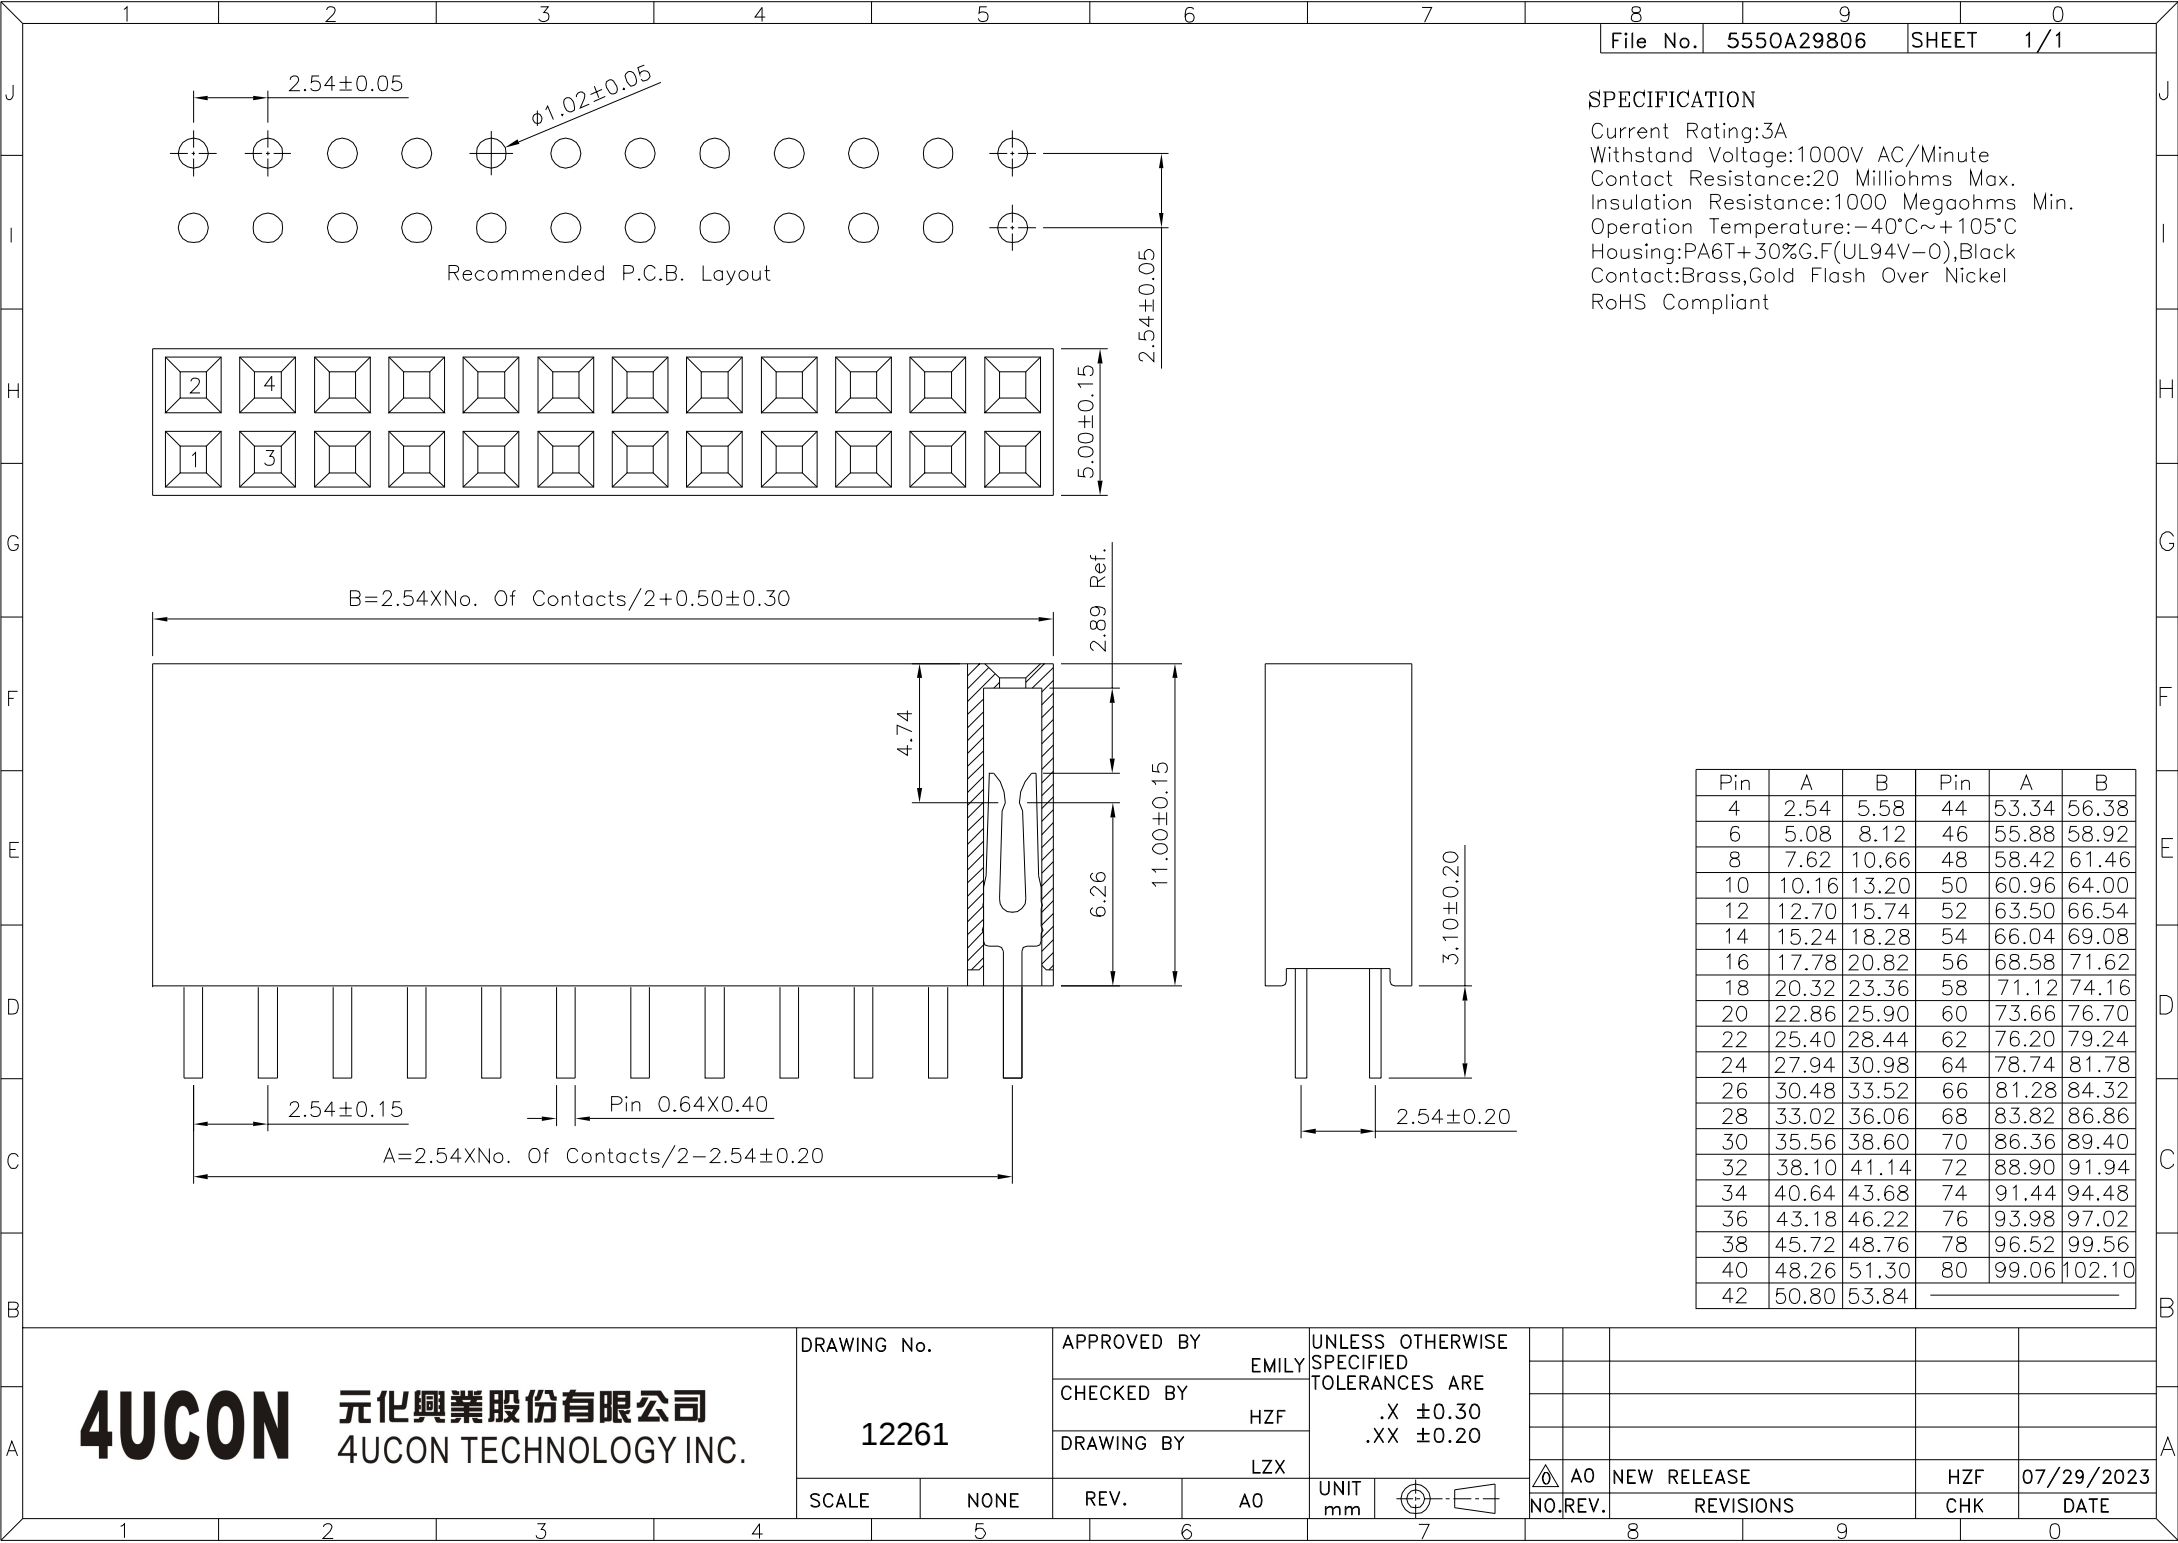

SPECIFICATION

Current Rating:3A

Withstand Voltage:1000V AC/Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operation Temperature:−40°C~+105°C

Housing:PA6T+30%G.F(UL94V−0),Black

Contact:Brass,Gold Flash Over Nickel

RoHS Compliant

Pin	A	B	Pin	A	B
4	2.54	5.58	44	53.34	56.38
6	5.08	8.12	46	55.88	58.92
8	7.62	10.66	48	58.42	61.46
10	10.16	13.20	50	60.96	64.00
12	12.70	15.74	52	63.50	66.54
14	15.24	18.28	54	66.04	69.08
16	17.78	20.82	56	68.58	71.62
18	20.32	23.36	58	71.12	74.16
20	22.86	25.90	60	73.66	76.70
22	25.40	28.44	62	76.20	79.24
24	27.94	30.98	64	78.74	81.78
26	30.48	33.52	66	81.28	84.32
28	33.02	36.06	68	83.82	86.86
30	35.56	38.60	70	86.36	89.40
32	38.10	41.14	72	88.90	91.94
34	40.64	43.68	74	91.44	94.48
36	43.18	46.22	76	93.98	97.02
38	45.72	48.76	78	96.52	99.56
40	48.26	51.30	80	99.06	102.10
42	50.80	53.84			

NO. REV. REVISIONS CHK DATE