


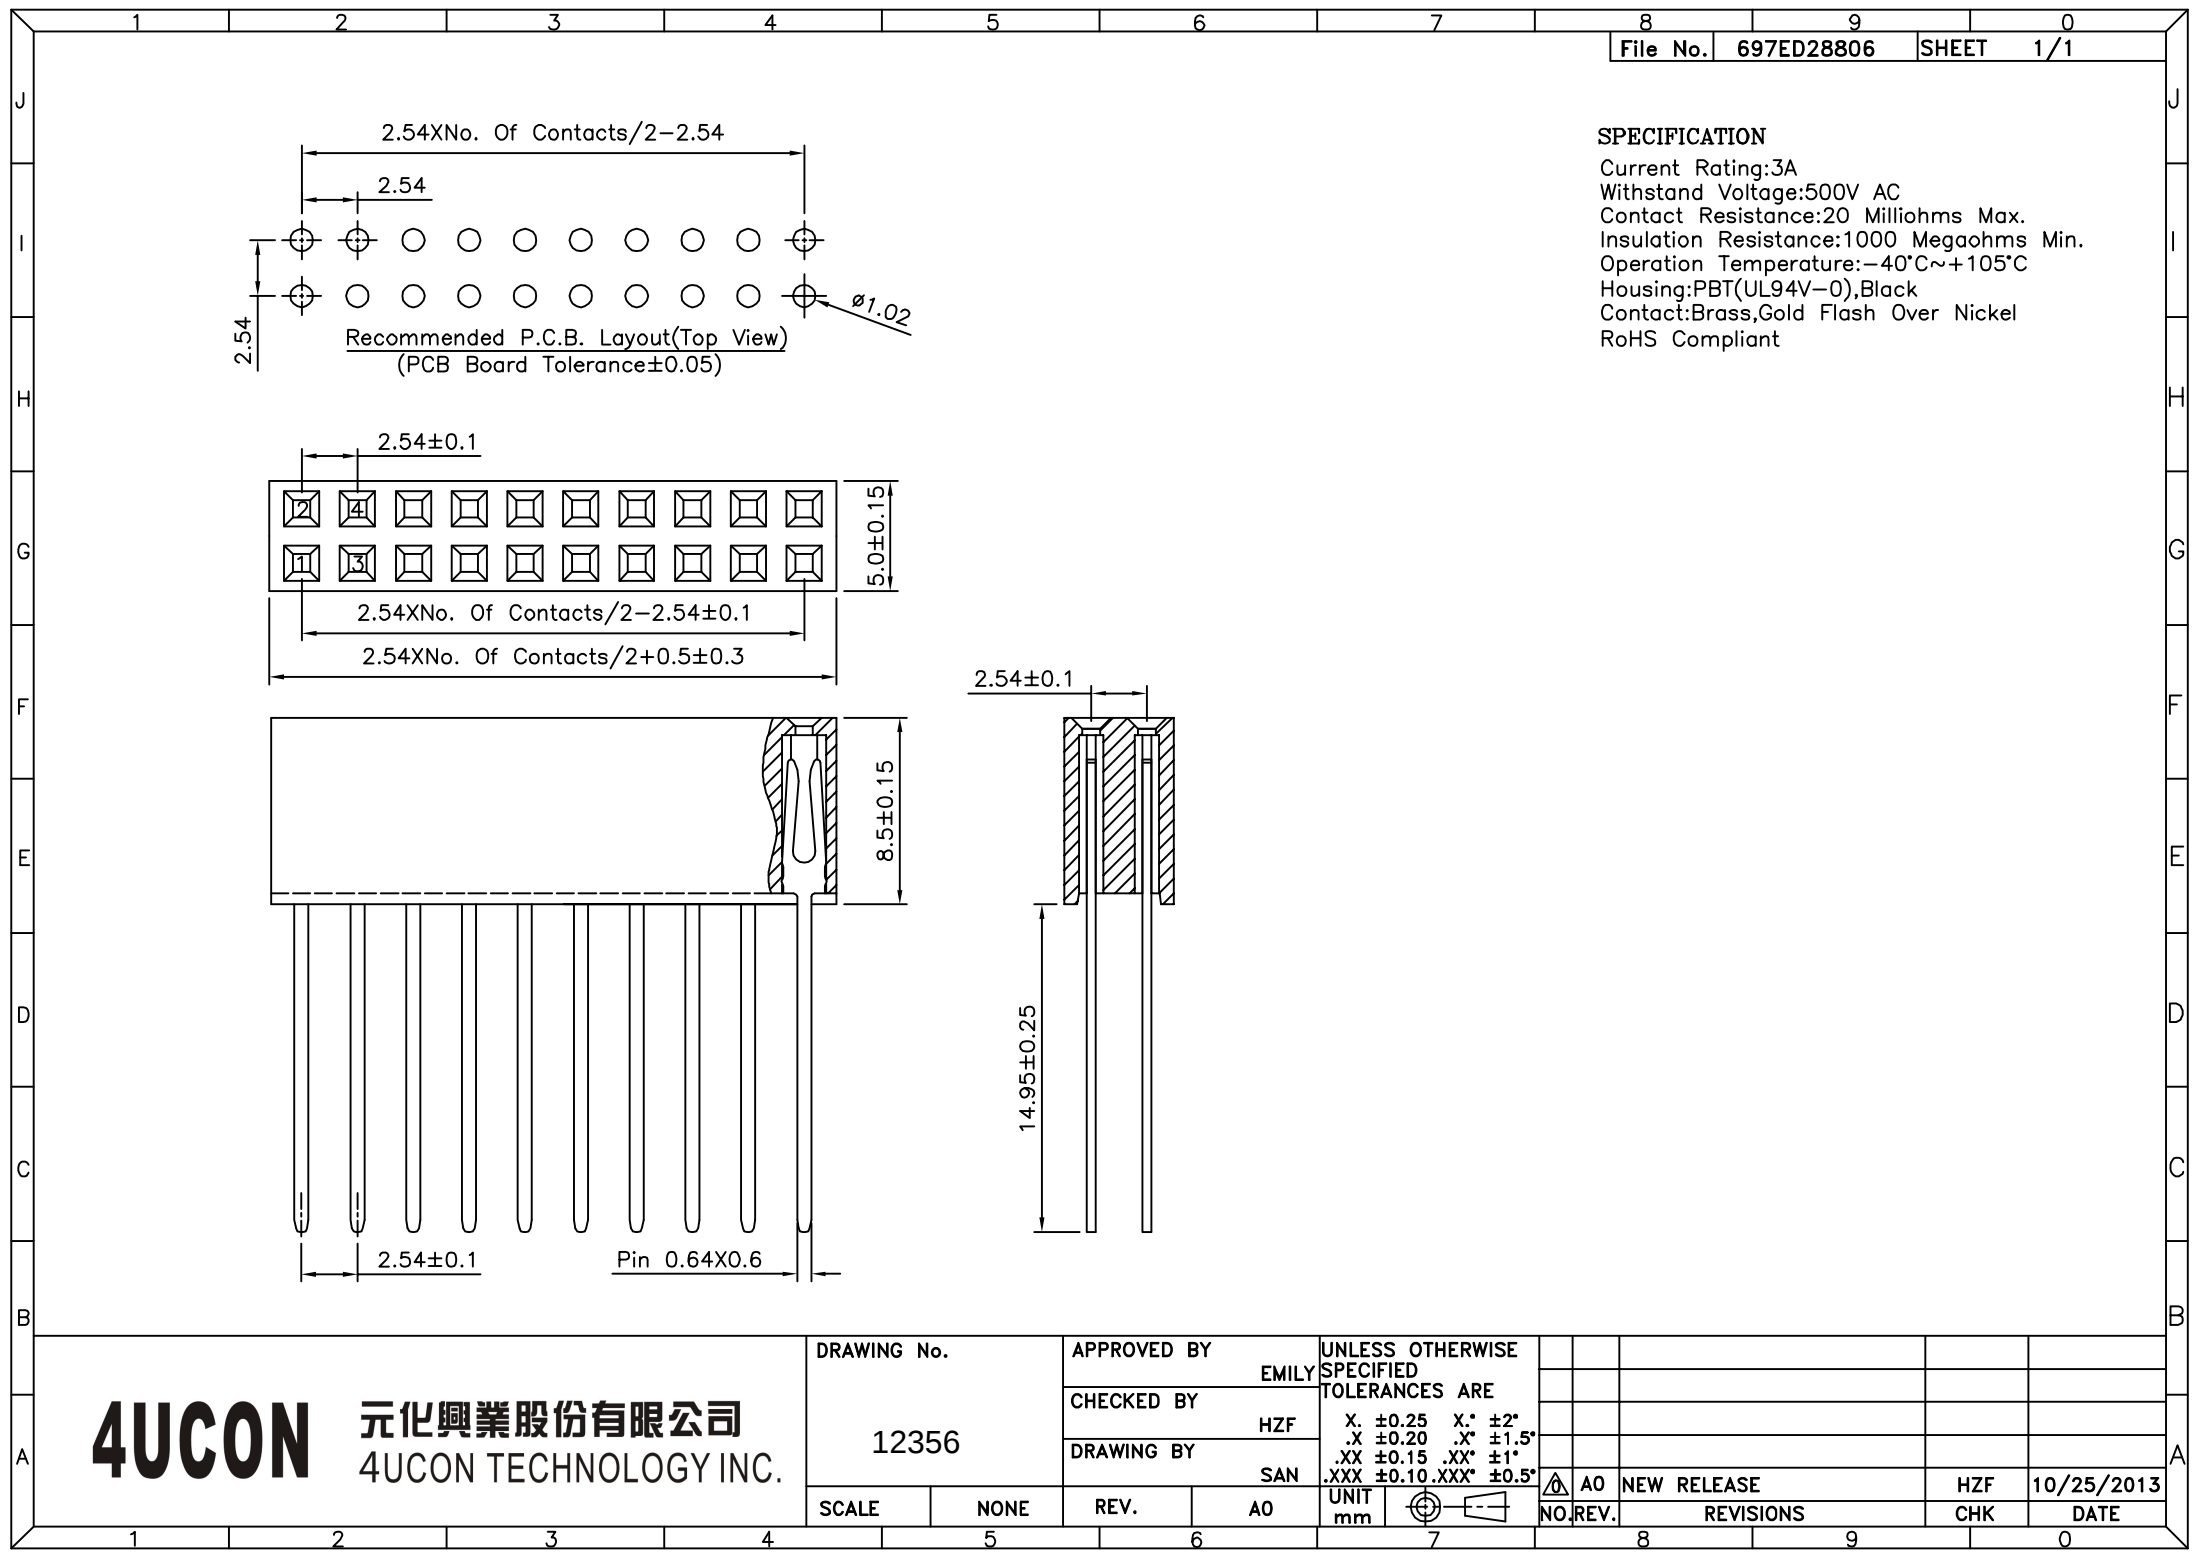

SPECIFICATION

Current Rating:3A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12356

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SAN

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X." $\pm 2^\circ$
.X ± 0.20 .X" $\pm 1.5^\circ$
.XX ± 0.15 .XX" $\pm 1^\circ$
.XXX ± 0.10 .XXX" $\pm 0.5^\circ$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

10/25/2013