

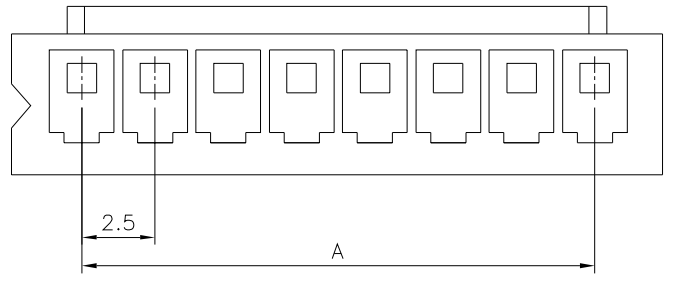



△ SPECIFICATION
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C~+85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC/Minute
 Insulator: PA66(UL94V-0), Nature
 RoHS Compliant





△



△ 2 Pin

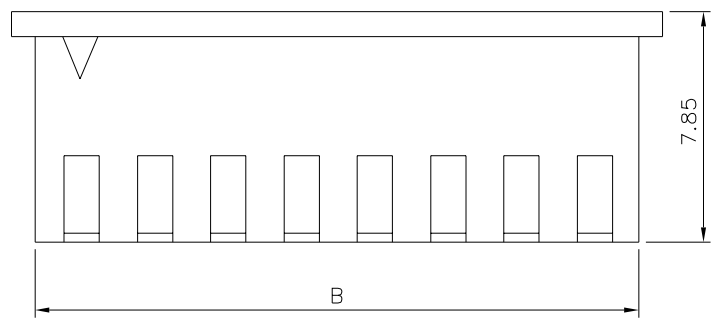

△

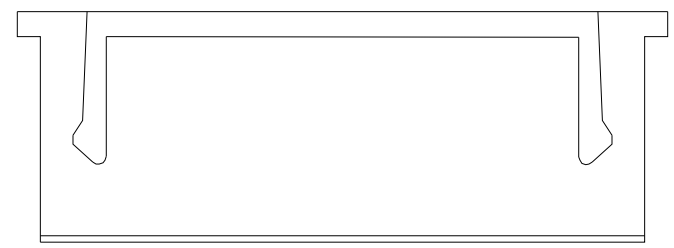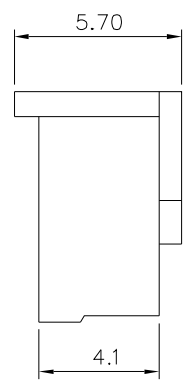

△ 3~20 Pin

Pin	A	B
02	2.50	5.70
03	5.00	8.20
04	7.50	10.70
05	10.00	13.20
06	12.50	15.70
07	15.00	18.20
08	17.50	20.70
09	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20
16	37.50	40.70
20	47.50	50.70

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 △ .XX ±0.20				
12486		MEI			△ A3	Modify Data	HZF	12/04/2013
		CHECKED BY			△ A2	Modify Data	HZF	03/24/2010
		DRAWING BY		△ A1	Modify Data	BECKY	2004/11/19	
SCALE		NONE		△ A0	NEW RELEASE			
REV.	A3	UNIT	mm	NO. REV.	REVISIONS	CHK	DATE	