

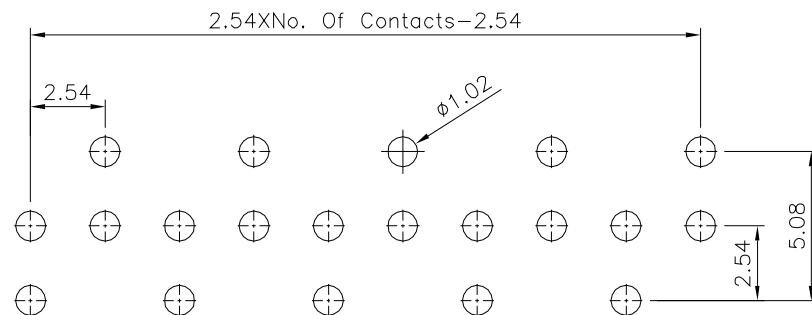



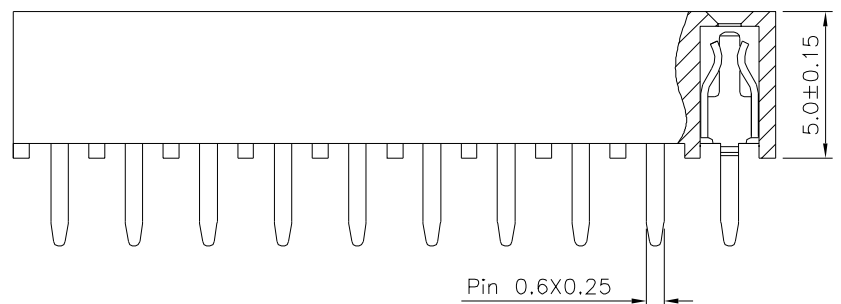

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

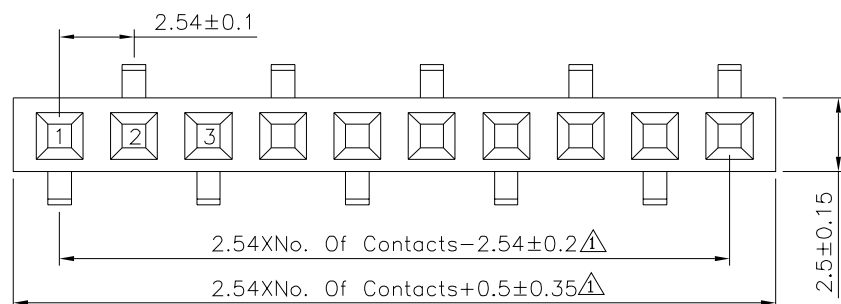

SPECIFICATION

Current Rating:3A
 Δ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12564

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$
 .X ± 0.20 .X* $\pm 1.5^{\circ}$
 .XX ± 0.15 .XX* $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

SCALE

NONE

REV.

A1

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

Δ A1

Modify Data

HZF

07/26/2021

Δ A0

NEW RELEASE

HZF

11/19/2013