
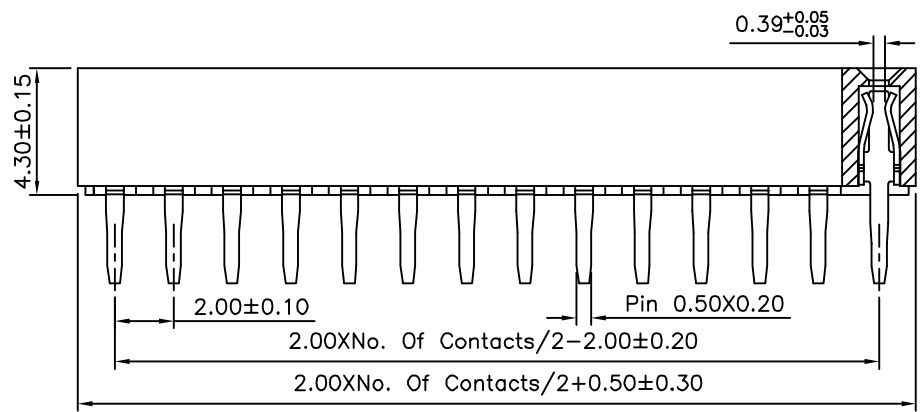



Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance±0.05)

**△ SPECIFICATION**

- Current Rating:2.0 Amp
- Withstand Voltage:500V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C
- △ Insulator:PA9T+30%G.F.(UL94V-0),Black
- Contact:Phosphor Bronze,Gold Plated Over Nickel
- RoHS Compliant

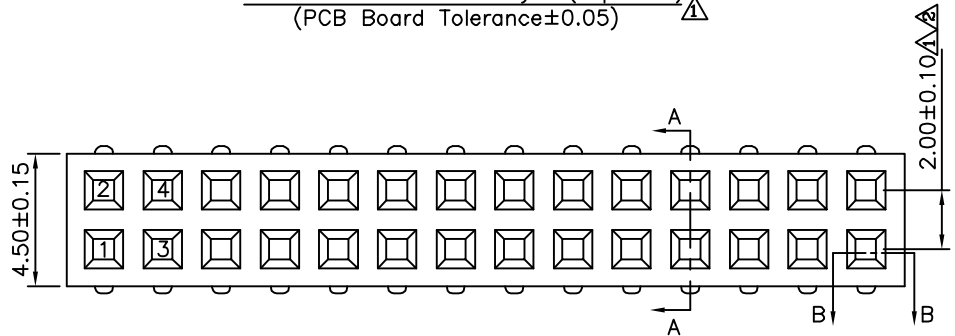

△△ Section B-B



△△ Section A-A

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
12811  
SCALE NONE

APPROVED BY EMILY  
CHECKED BY HZF  
DRAWING BY HAO  
REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
.X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG. ±3°  
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A4		Modify Dim.	HZF	09/24/2015
△ A3		Modify Data	HZF	11/27/2014
△ A2		Modify Data	HZF	10/11/2012
△ A1		Modify Data	HZF	08/18/2011
△ A0		NEW RELEASE	BECKY	11/04/2005