
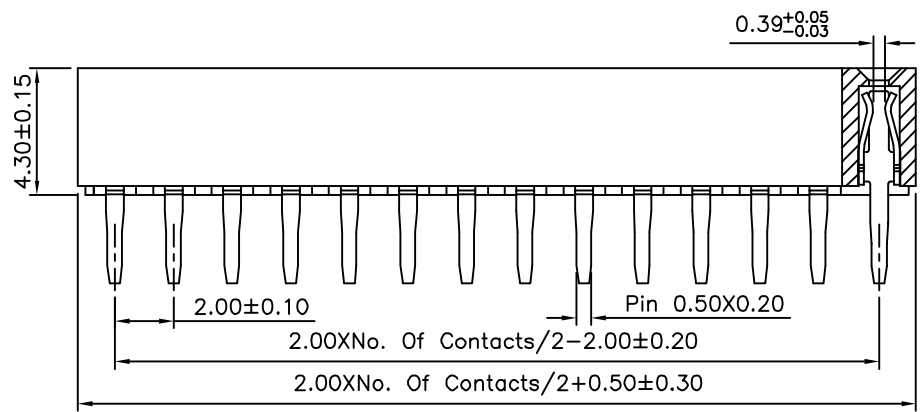



Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance±0.05)

**△ SPECIFICATION**

- Current Rating:2.0 Amp
- Withstand Voltage:500V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C
- △ Insulator:PA9T+30%G.F.(UL94V-0),Black
- Contact:Phosphor Bronze,Gold Plated Over Nickel
- RoHS Compliant

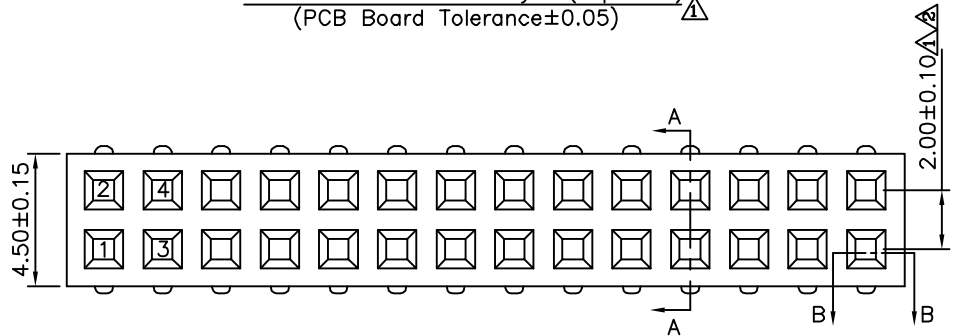

△△ Section B-B



△△ Section A-A

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°	△ A4	Modify Dim.	HZF	09/24/2015
12814		EMILY			△ A3	Modify Data	HZF	11/27/2014
		CHECKED BY			△ A2	Modify Data	HZF	10/11/2012
SCALE NONE		DRAWING BY		△ A1	Modify Data	HZF	08/18/2011	
		HAO		△ A0	NEW RELEASE	BECKY	11/04/2005	
REV.	A4	UNIT	mm	NO.REV.	REVISIONS	CHK	DATE	

