
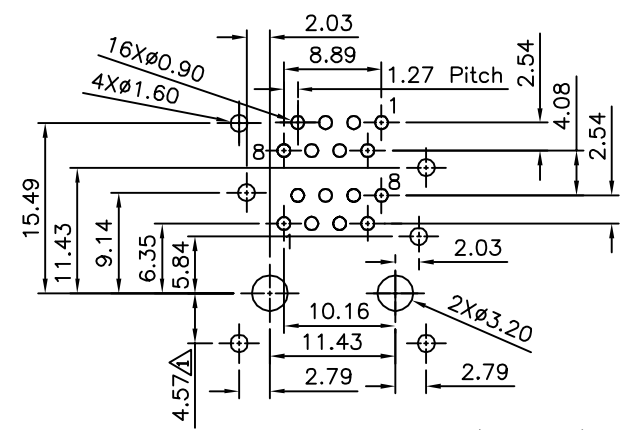


**△ SPECIFICATION**

Housing:PBT+G.F.(UL94V-0),Black  
 Insert:PBT+G.F.(UL94V-0),Black  
 Cover:PBT+G.F.(UL94V-0),Black  
 Contacts:Phosphor Bronze  
 Gold Plated 06u" On Contact Area,Gold  
 Flash On Other Area,Over Nickel  
 Shield:Brass,Nickel Plated  
 Cavity Confirms To FCC Rules And Regulations  
 Part 68,Subpart F.  
 RoHS Compliant

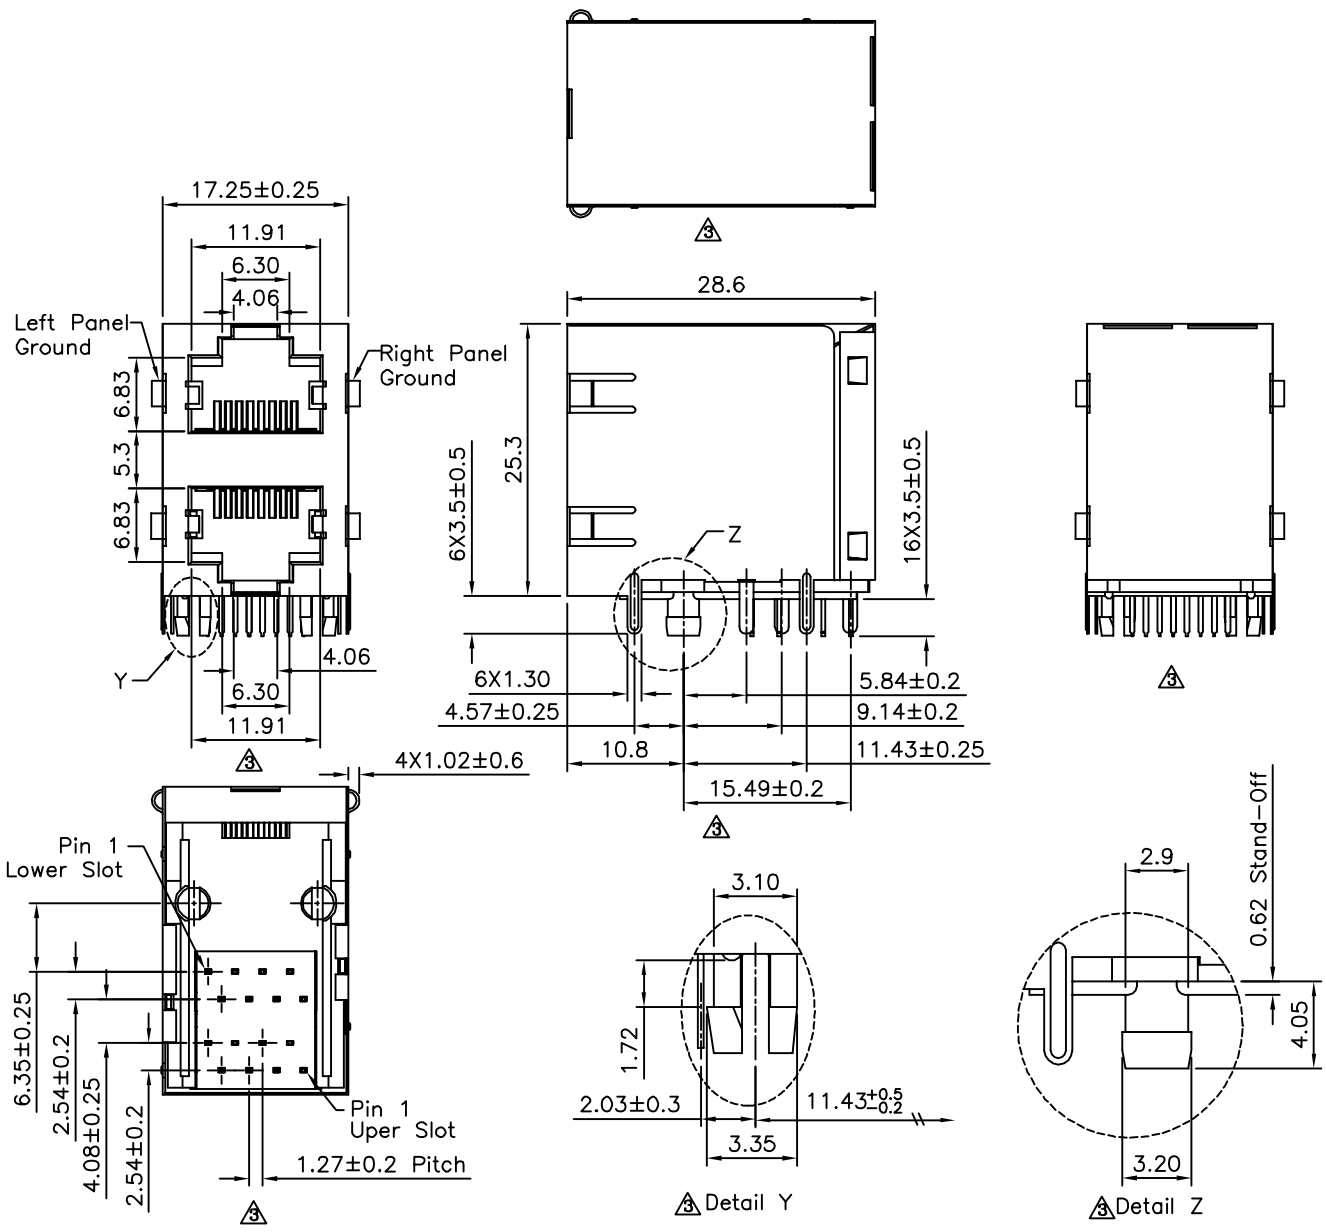

Recommended P.C.B. Layout (Top View)  
 △ (PCB Board Tolerance±0.05) Thickness:1.6mm

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.13 .XXX ±0.05
12929		MEI		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	09/07/2015
△ A1		Modify Data	MEI	08/16/2004
△ A1		MODIFY DIM. 4.75 → 4.57	MEI	08/16/2004
△ A0		NEW RELEASE		