
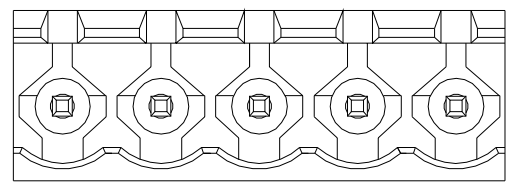
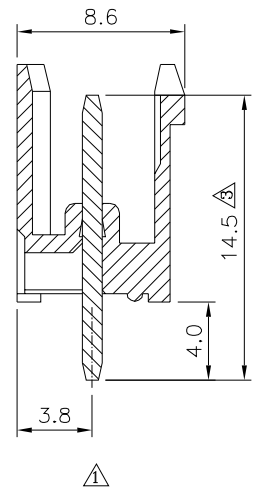


Recommended P.C.B. Layout

△△ SPECIFICATION

Voltage Rating:300V AC
 Current Rating:16A
 Withstanding Voltage:2500V AC(1 Minute)
 Using Temperature Range:-40°C~+105°C
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body:Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant

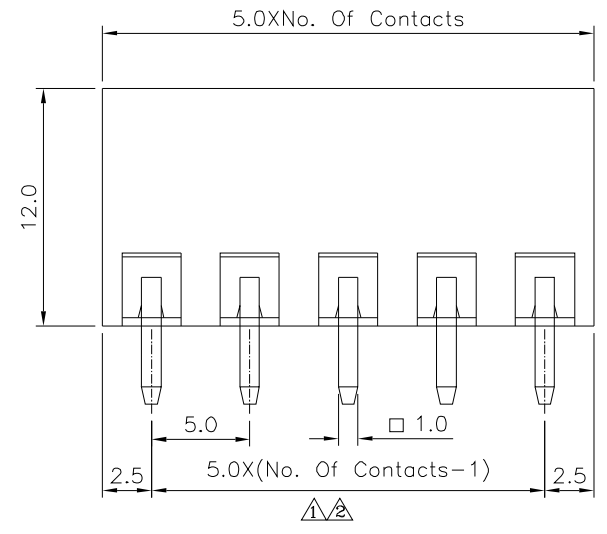

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.50 △.X ±0.30 △.XX ±0.20 ANG. ±1°
13281		EMILY		
		CHECKED BY HZF		
SCALE NONE		DRAWING BY HAO		
		REV. A3		

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	10/30/2023
△	A2	Modify Data	HZF	10/24/2015
△	A1	Modify Data	HZF	08/08/2012
△	A0	NEW RELEASE	HZF	08/12/2009

