

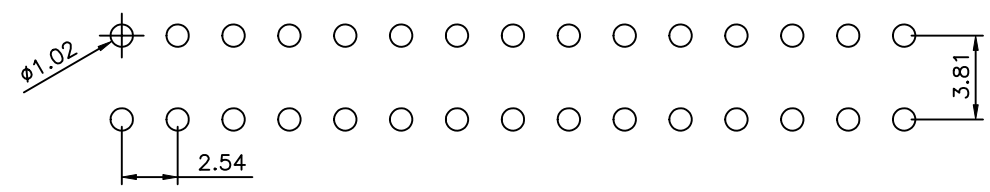



SPECIFICATION
 Current Rating:3.0Amp
 Voltage Rating:500V AC/DC
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze
 Gold Plated Over Nickel
 Insulator:PA6T+30%GF UL94V-0
 RoHS Compliant

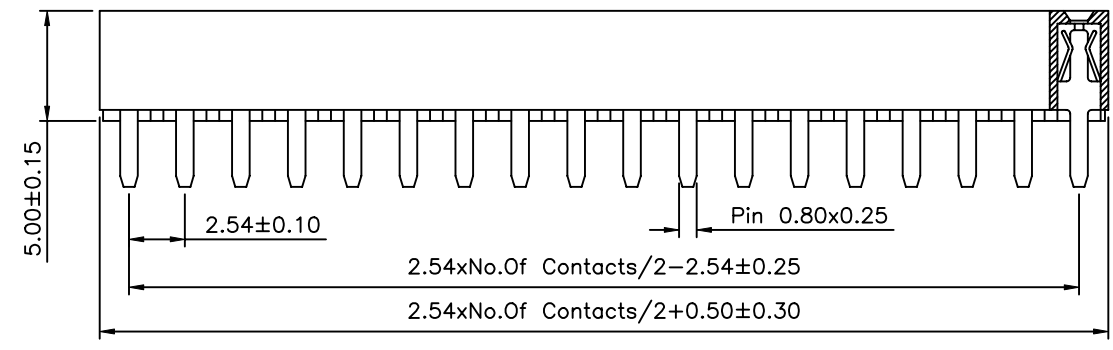

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance ± 0.05)

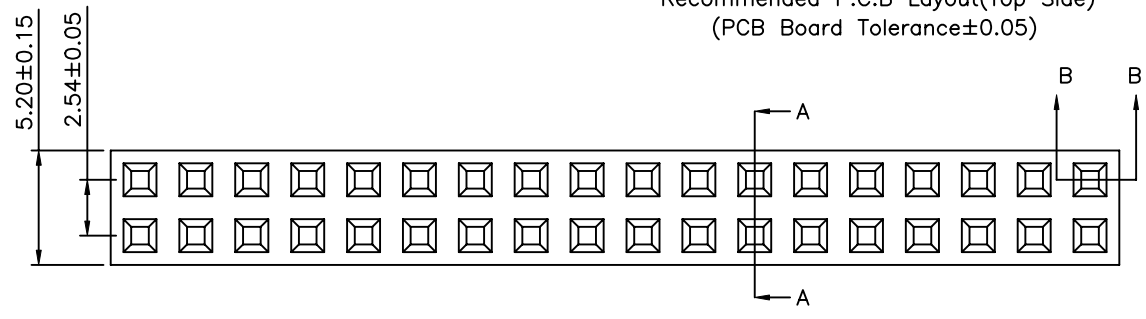

Section: A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.40 .XX ± 0.25 .XXX ± 0.15 ANG: $\pm 3^\circ$					
13293		MEI							
		CHECKED BY							
		DRAWING BY		UNIT mm					
SCALE	NONE	REV.	A1			NO. REV.	REVISIONS	CHK	DATE
						A1	Modify P/N	HZF	05/19/2008
						A0	NEW RELEASE	HZF	04/25/2007