

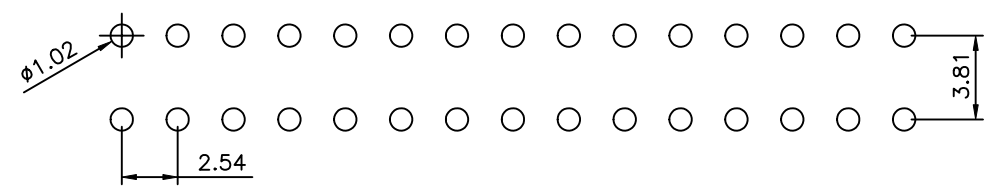



**SPECIFICATION**  
 Current Rating:3.0Amp  
 Voltage Rating:500V AC/DC  
 Contact Resistance:20Milliohms Max  
 Insulation Resistance:1000Megohm Min  
 Operation Temperature:-40°C~+105°C  
 Contact:Phosphor Bronze  
 Gold Plated Over Nickel  
 Insulator:PA6T+30%GF UL94V-0  
 RoHS Compliant

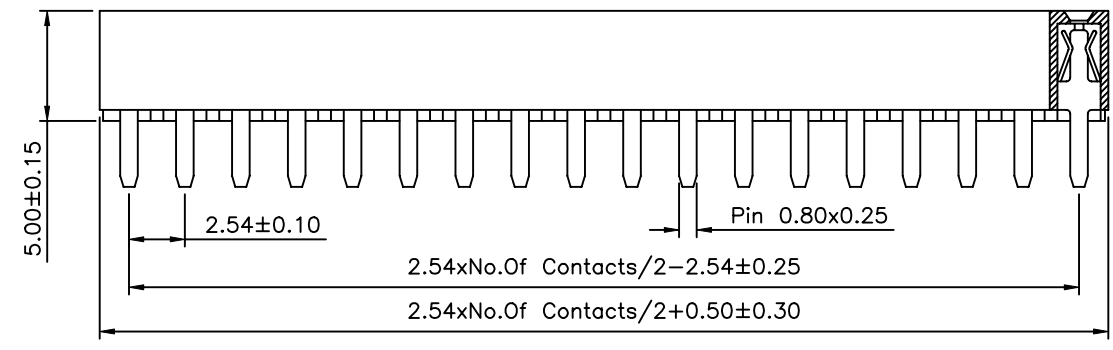

Recommended P.C.B Layout(Top Side)  
 (PCB Board Tolerance $\pm 0.05$ )

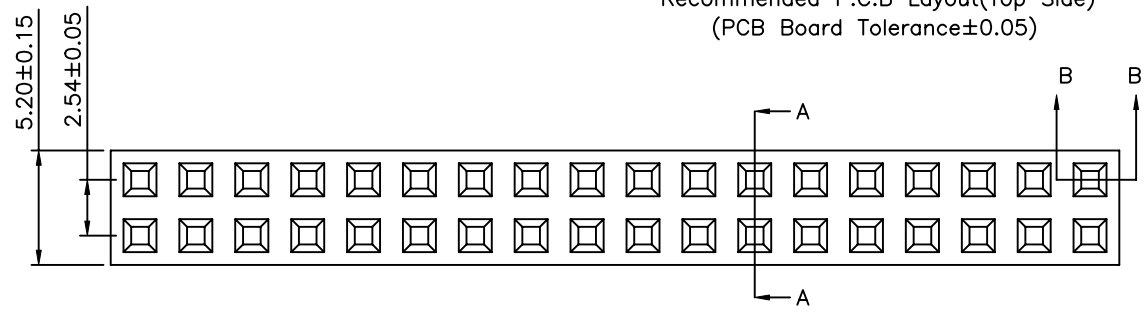

Section: A-A

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm 0.40$ .XX $\pm 0.25$ .XXX $\pm 0.15$ ANG: $\pm 3^\circ$			
13312		MEI					
		CHECKED BY					
		DRAWING BY					
SCALE		NONE		UNIT			
				mm			
REV.	A1	NO.	REV.	REVISIONS	CHK	DATE	