File No.	432	SHEET 1/1

SPECIFICATION
Current Rating:3.0Amp
Voltage Rating:500V AC/DC
Contact Resistance:20Milliohms Max
Insulation Resistance:1000Megohm Min
Operation Temperature:−40°C~+105°c
Contact:Phosphor Bronze
Gold Plated Over Nickel
Insulator:PA6T+30%GF UL94V−0
RoHS Compliant

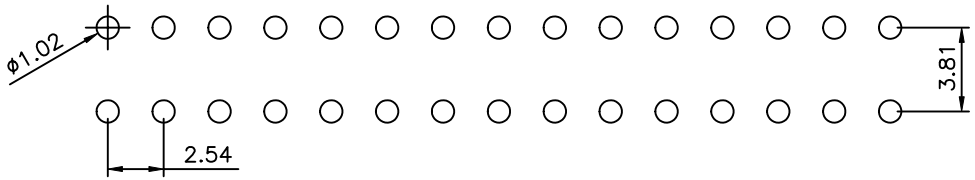

Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

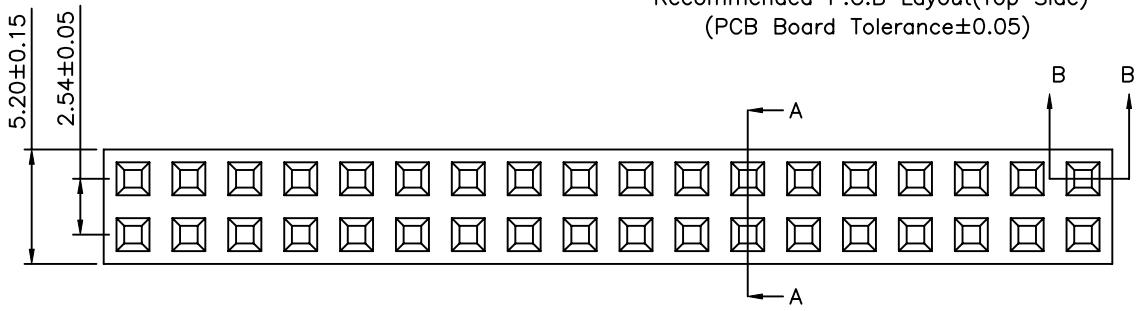

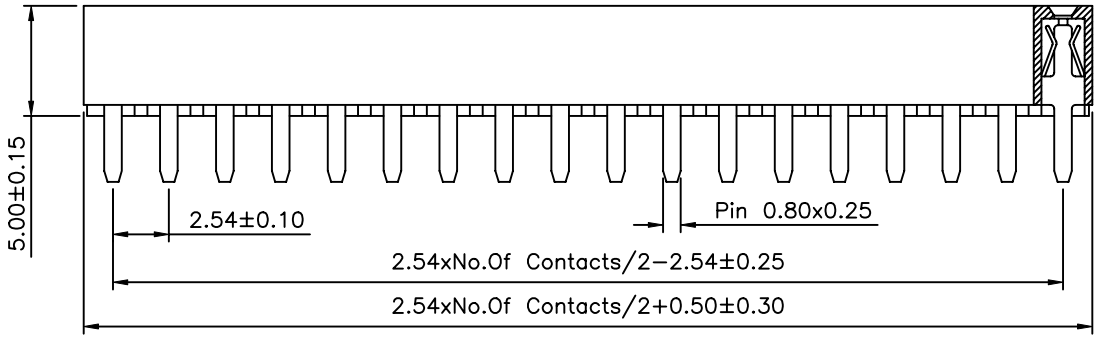



Section: A−A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
13320	MEI	.X ±0.40
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY LXX	.XXX ±0.15
		ANG: ±3°
SCALE NONE	REV. A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A1	Modify P/N	HZF	05/19/2008
0	A0	NEW RELEASE	HZF	04/25/2007