

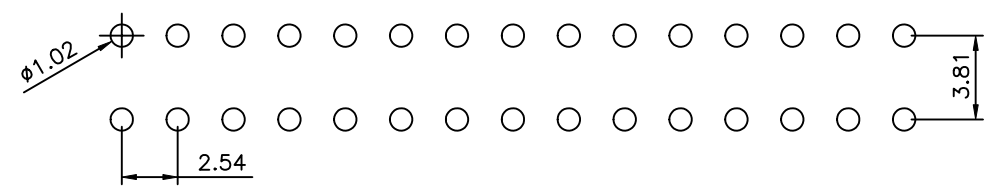



SPECIFICATION
 Current Rating:3.0Amp
 Voltage Rating:500V AC/DC
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze
 Gold Plated Over Nickel
 Insulator:PA6T+30%GF UL94V-0
 RoHS Compliant

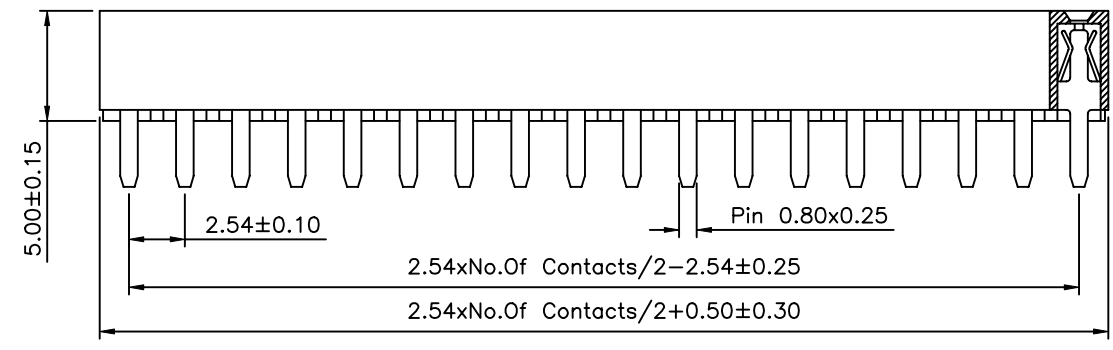

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance±0.05)

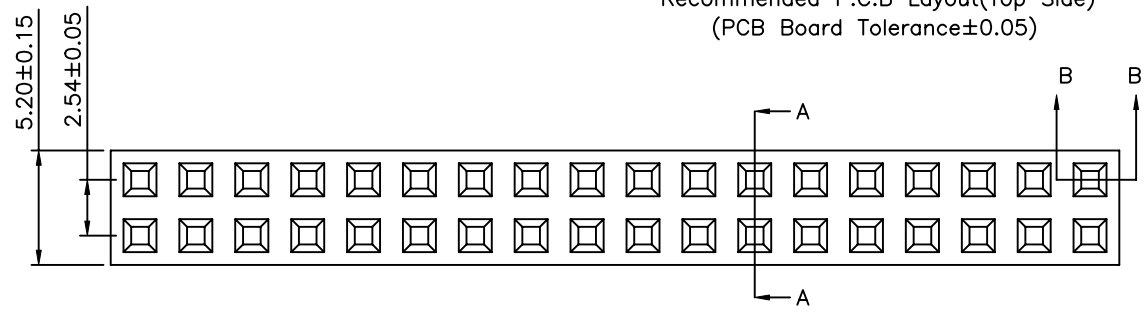

Section: A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG: ±3°			
13324		MEI					
		CHECKED BY					
		DRAWING BY		UNIT mm	NO.	REV.	REVISIONS
SCALE	NONE	REV.	A1				
		LXX		△ A1	Modify P/N	HZF	05/19/2008
		A1		△ A0	NEW RELEASE	HZF	04/25/2007