


**SPECIFICATIONS**




Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms Min.  
 Contact Resistance: 20 Milliohms Max.  
 Dielectric Withstanding: 500V AC  
 Operating Temperature: -40°C To +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: P.B.T  
 Finish: Tin, Gold Or Duplex Plated

© Note:

Duplex Plating: Gold Plated On Contact Area,  
 Tin On Solder Area

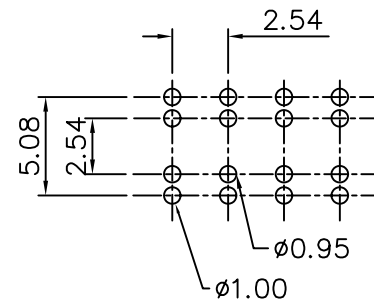

P.C. Board Hole Layout

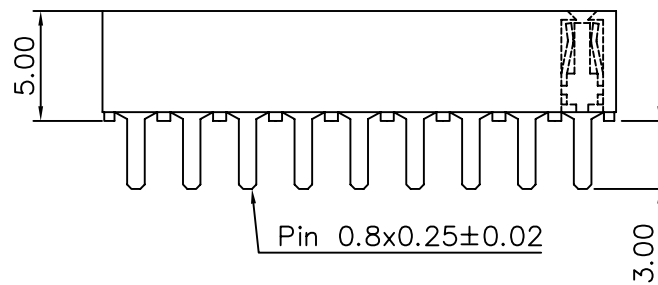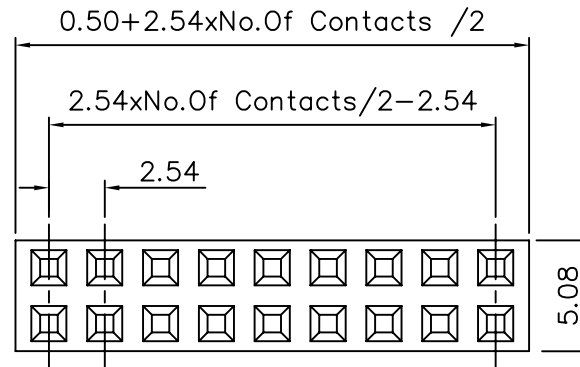

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 13327

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY TCF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 AWG.

SCALE NONE

REV. AO

UNIT mm

NO. REV.	AO	NEW RELEASE	BECKY	2004/07/30
		REVISIONS	CHK	DATE