




Recommended P.C.B. Layout



1X2P~1X36P






1X37P, 1X38P, 1X39P



1X40P

SPECIFICATION

Current: 3A
 Withstanding Voltage: 1000V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Housing: PA6T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

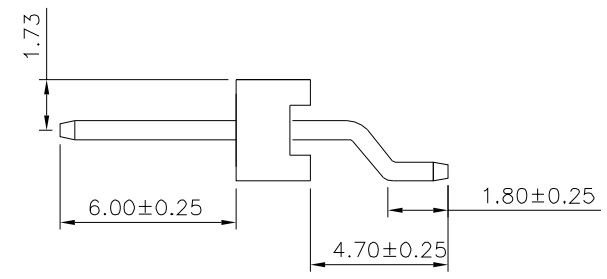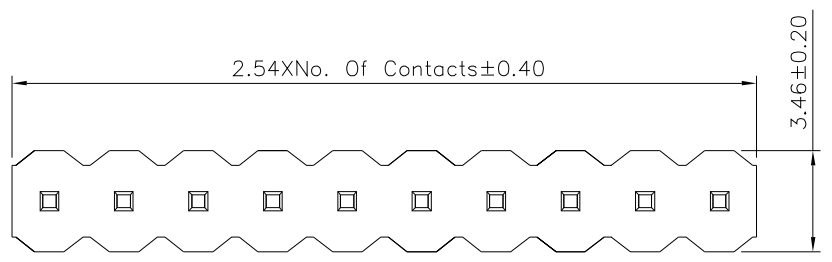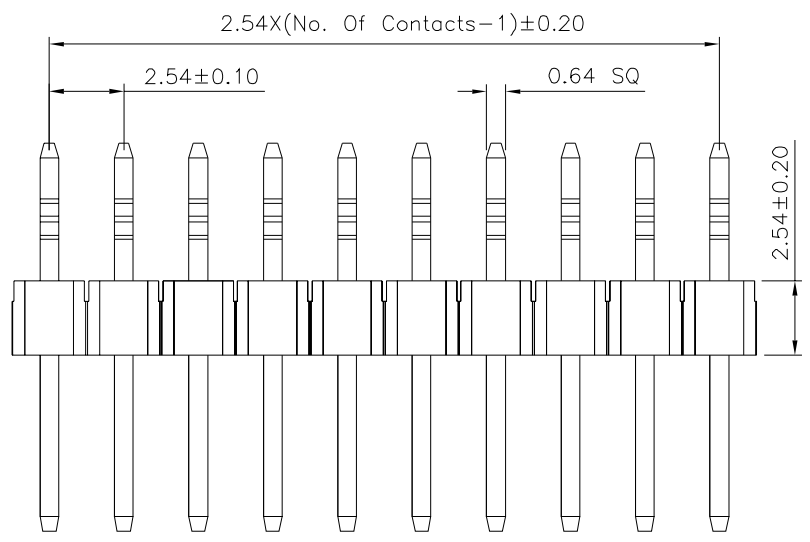

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.38 .XX ± 0.25 .XXX ± 0.05
13402		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	B0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B0		NEW RELEASE	HZF	10/16/2019