

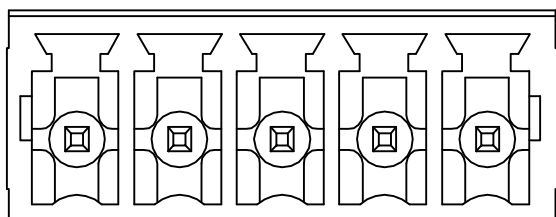


Recommended P.C.B. Layout

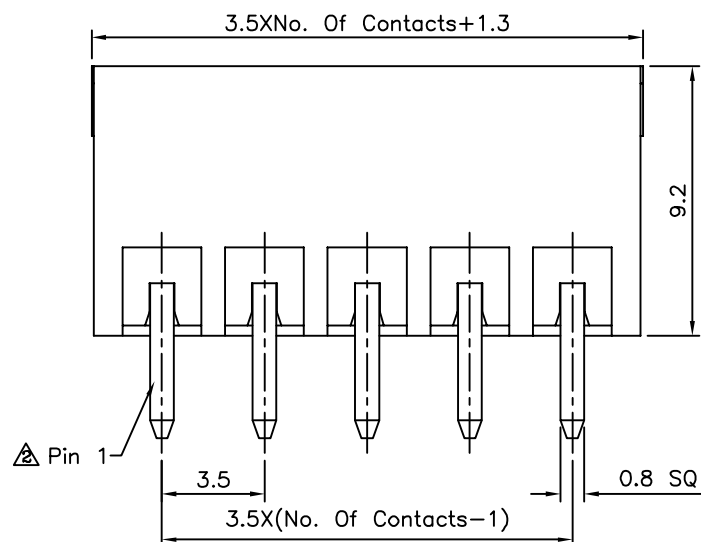

3/4

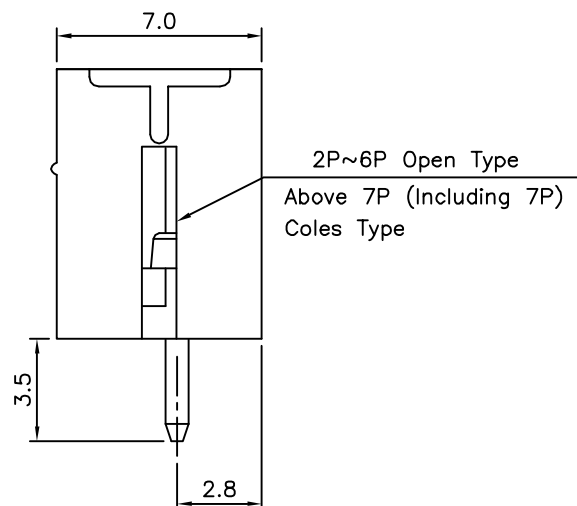

△ SPECIFICATION

Current Rating:12 Amp/Way Max.
 Voltage Rating:300V AC
 Withstanding Voltage:2500V AC For 1 Minute
 Test Time=60 Sec/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5 Seconds Max.
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0)
 ,Green
 Solder Pin:Copper Alloy,Tin Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13752

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△A4		Modify Data	HZF	05/28/2012
△A3		Modify Data	HZF	11/23/2011
△A2		Add Pin 1	HZF	11/22/2011
△A1		Modify Data	HZF	10/14/2011
△A0		NEW RELEASE	HZF	04/07/2009

SCALE

NONE

REV.

A4