
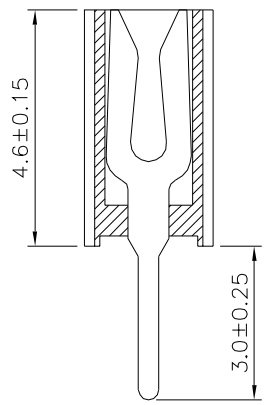
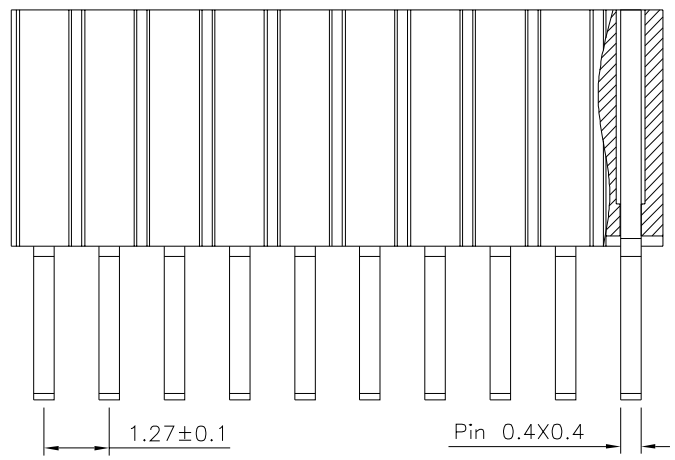


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

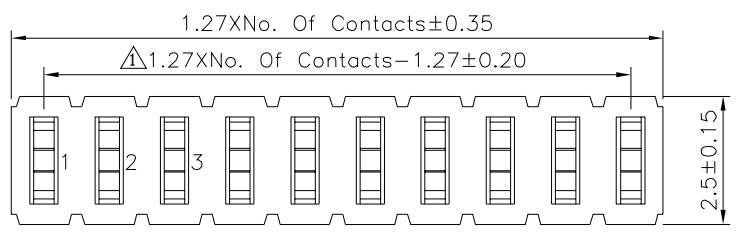

SPECIFICATION

Current Rating: 1 Amp
 Withstand Voltage: 500V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: -40°C ~ +105°C
 Insulator: PA6T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
13774		MEI		
		CHECKED BY		
SCALE		NONE		X: ±0.25 X*: ±2°
		REV.		.X ±0.20 .X*: ±1.5°
A1		HAO		.XX ±0.15 .XX*: ±1°
UNIT		mm		.XXX ±0.10 .XXX*: ±0.5°

NO.	REV.	REVISIONS	CHK	DATE
△A1	A1	Modify Data	HZF	03/26/2016
△A0	A0	NEW RELEASE	HZF	02/01/2015