
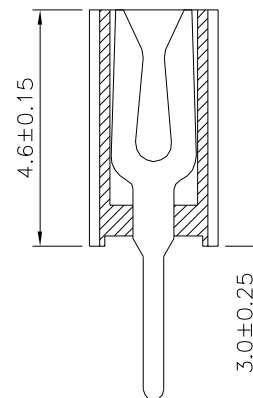
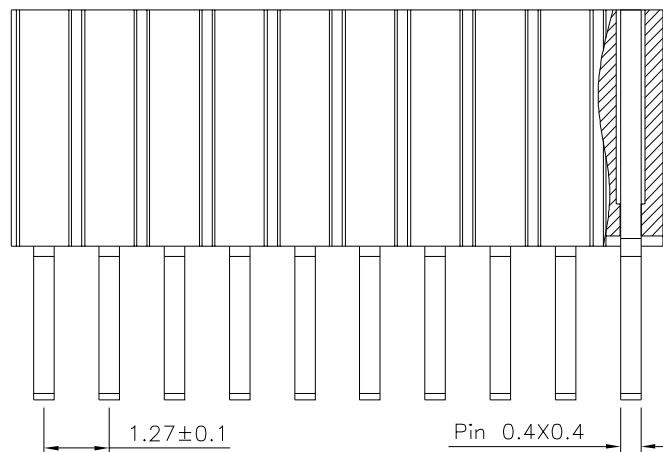


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

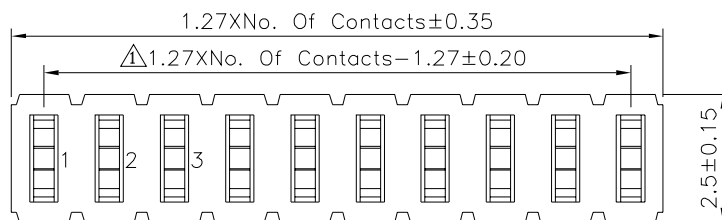

SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13775

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X: ± 0.25	X.: $\pm 2^\circ$
.X ± 0.20	.X: $\pm 1.5^\circ$
.XX ± 0.15	.XX: $\pm 1^\circ$
.XXX ± 0.10	.XXX: $\pm 0.5^\circ$

SCALE

NONE

REV.

A1

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

A1

Modify Data

A0

NEW RELEASE

HZF

03/26/2016

HZF

02/01/2015