
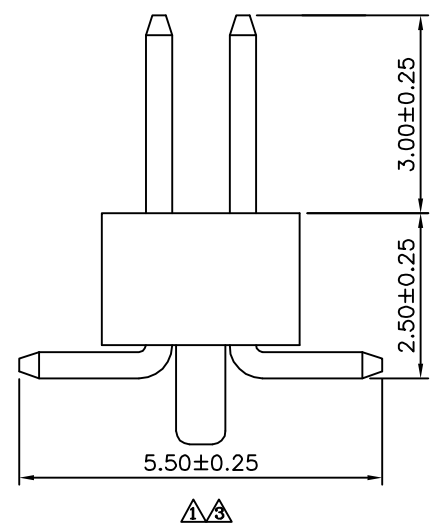


△ SPECIFICATION
 △ Current:1A
 Withstanding Voltage:1000V AC Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 △ No. Of Contacts:06~100 Contacts
 RoHS Compliant

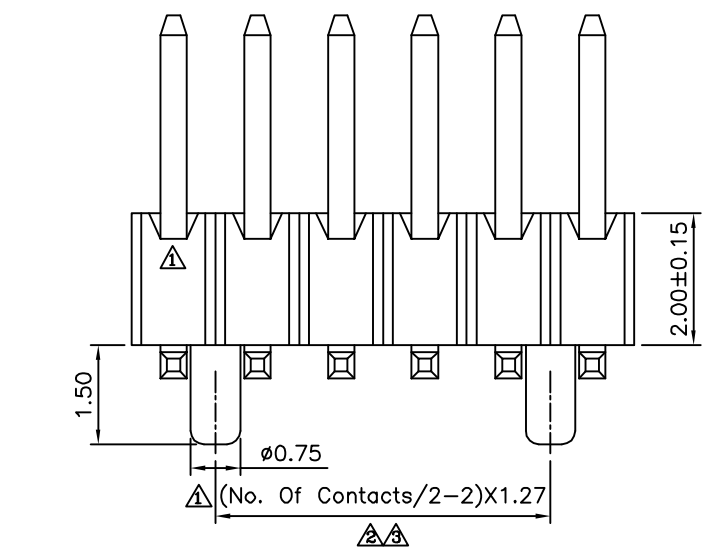

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|----------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5° |
| 14028 | | EMILY | | |
| | | CHECKED BY HZF | | |
| | | DRAWING BY YBL | | |
| SCALE | NONE | REV. | A3 | UNIT mm |

| | | | | |
|------|------|-------------|------|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A3 | | Modify Data | HZF | 11/29/2013 |
| △ A2 | | Modify Data | HZF | 01/03/2011 |
| △ A1 | | Modify Data | HZF | 07/02/2009 |
| △ A0 | | NEW RELEASE | SHIN | 08/14/2006 |