

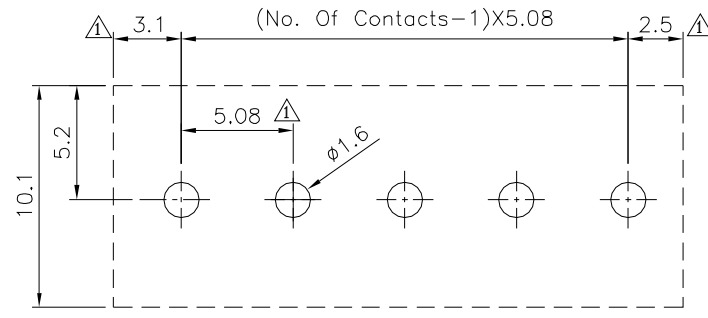
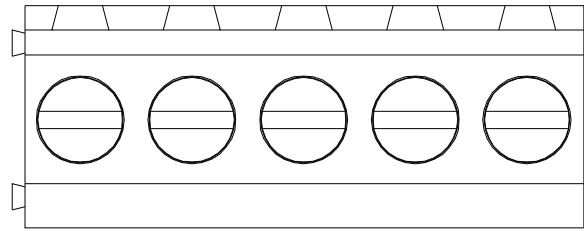


**△ SPECIFICATION**  
 Voltage Rating:300V AC  
 Current Rating:16 Amps/Way Max.  
 Contact Resistance:20 Milliohms Max.  
 Withstanding Voltage:2500V AC(1 Minute)  
 Test Time=60 Sec/PCS  
 Wire Range:12~30AWG  
 △ Torque:4.5 kgf.cm/M3  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:250°C±10°C/5 Seconds Max.  
 △ Contact(Metal Housing):Copper Alloy,Nickel Plated  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 Solder Pin:Copper Alloy,Tin Plated  
 △ Insulator Body(Housing):Polyamide(UL94V-0),Green  
 RoHS Compliant  
 \*2~24P Available~

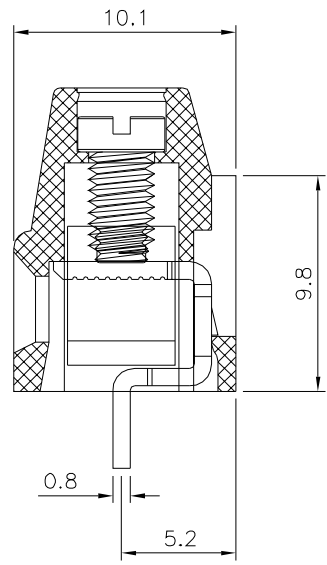

Recommended P.C.B. Layout

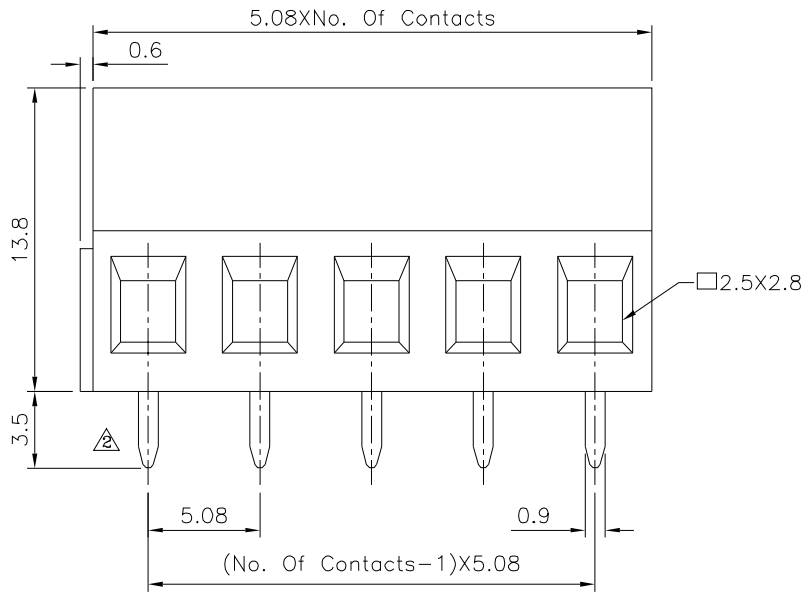

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X.* ±1"	△ A4	Modify Data	HZF	07/16/2021	
14297		MEI			△ A3	Modify Spec.	HZF	05/31/2017	
		CHECKED BY			△ A2	Modify Data	HZF	08/26/2013	
		HZF		△ A1	Modify Data	HZF	08/26/2011		
		DRAWING BY		△ A0	NEW RELEASE	HZF	05/24/2010		
SCALE		NONE		UNIT	mm	NO. REV.	REVISIONS	CHK	DATE
		REV.		A4					