



**△ SPECIFICATION**

Voltage Rating:300V AC  
 Current Rating:16 Amps/Way Max.  
 Contact Resistance:20 Milliohms Max.  
 Withstanding Voltage:2500V AC(1 Minute)  
 Test Time=60 Sec/PCS


- Wire Range:12~30AWG
- △ Torque:4.5 kgf.cm/M3
- Operation Temperature:-40°C~+105°C
- Soldering Reliability:250°C±10°C/5 Seconds Max.
- △ Contact(Metal Housing):Copper Alloy,Nickel Plated
- Terminal Screw:Steel,Galvanized With Cr3+ Plated
- Solder Pin:Copper Alloy,Tin Plated
- △ Insulator Body(Housing):Polyamide(UL94V-0),Green  
RoHS Compliant
- \*2~24P Available~

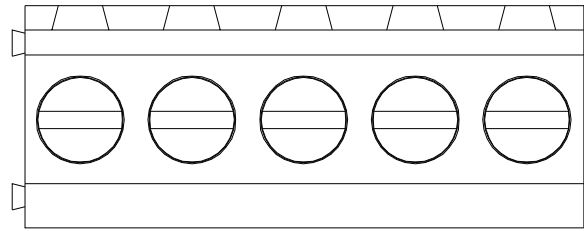


△

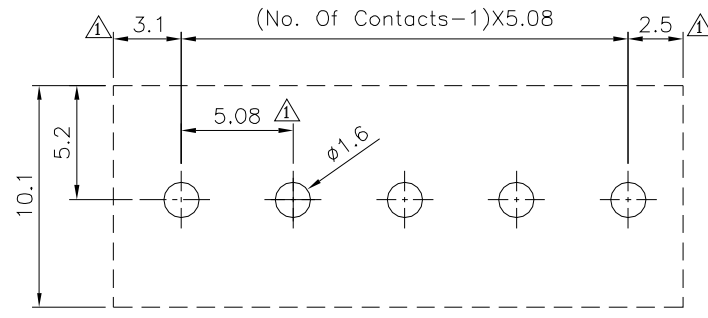

Recommended P.C.B. Layout

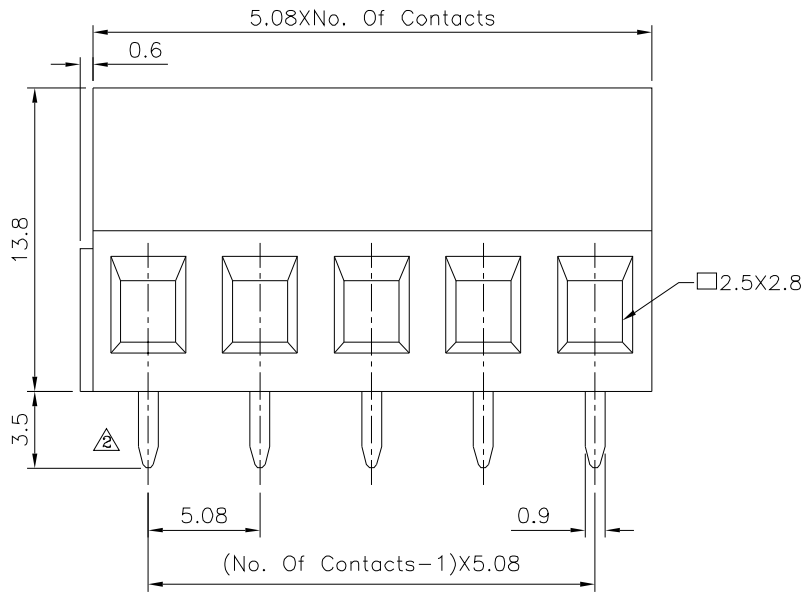

△

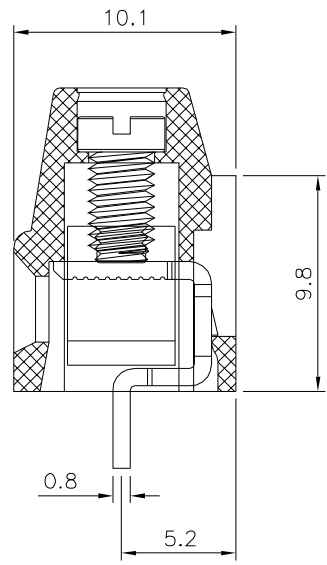

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 14300

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 X.\* ±1"

SCALE NONE

REV. A4

UNIT mm

△ A4	Modify Data	HZF	07/16/2021
△ A3	Modify Spec.	HZF	05/31/2017
△ A2	Modify Data	HZF	08/26/2013
△ A1	Modify Data	HZF	08/26/2011
△ A0	NEW RELEASE	HZF	05/24/2010
NO. REV.	REVISIONS	CHK	DATE