

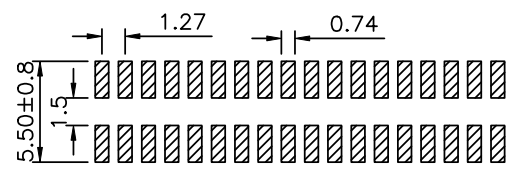
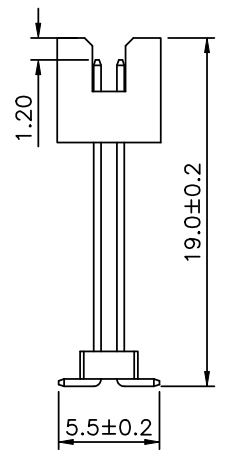


SPECIFICATION

Current Rating:3Amp
 Contact Resistance:20Milliohms Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C~+105°C
 Contact Material:Brass
 Contact Plating:Gold Plated Over Nickel
 Insulator Material:PA6T+30%GF(UL94V-0)
 RoHS Compliant

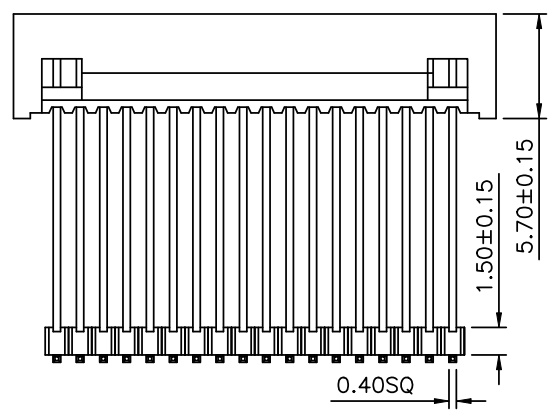

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance±0.05)

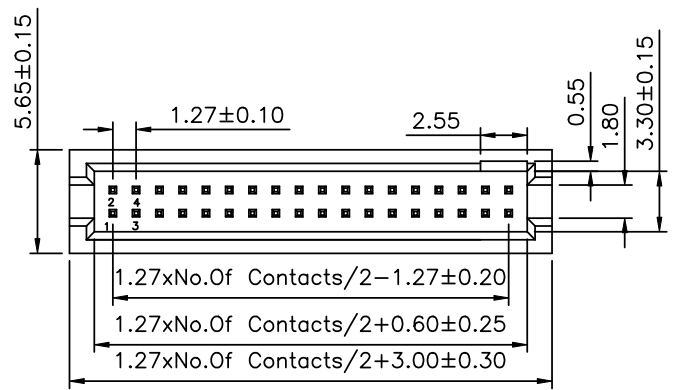

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
14785		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.40					
		HZF		.XX ±0.25					
		DRAWING BY		.XXX ±0.15					
		JLT		ANG: ±3°					
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	HZF	12/27/2007
						NO.REV.	REVISIONS	CHK	DATE