

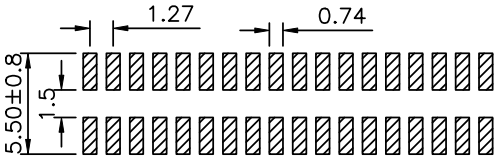
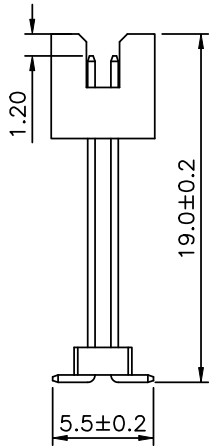


SPECIFICATION

Current Rating:3Amp
Contact Resistance:20Milliohms Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000Megohm Min
Operation Temperature:-40°C~+105°C
Contact Material:Brass
Contact Plating:Gold Plated Over Nickel
Insulator Material:PA6T+30%GF(UL94V-0)
RoHS Compliant

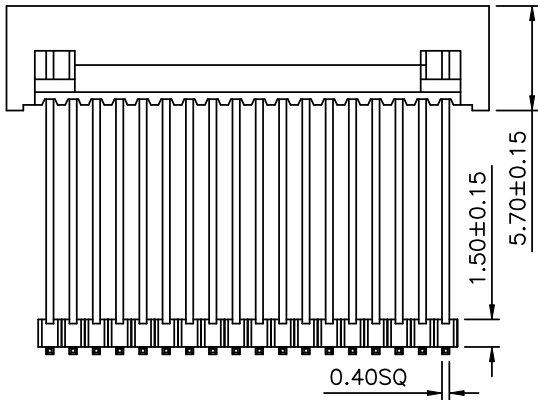

Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

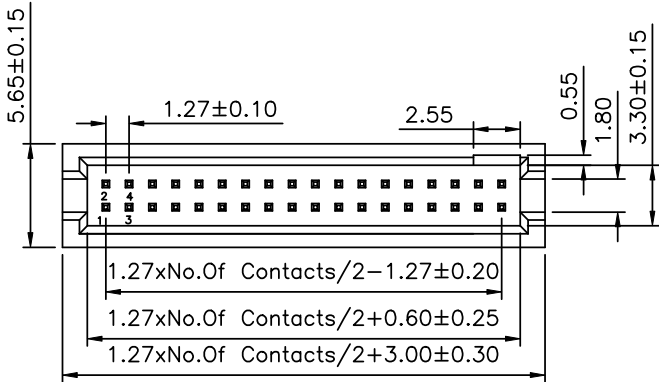

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 14792		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG: ±3°						
		CHECKED BY HZF								
		DRAWING BY JLT								
		SCALE NONE								
SCALE	NONE	REV.	A0	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE
						△ A0		NEW RELEASE	HZF	12/27/2007