

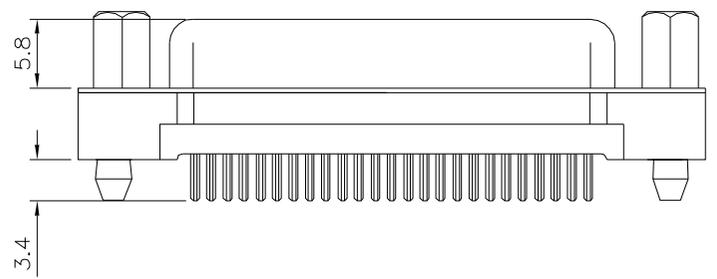
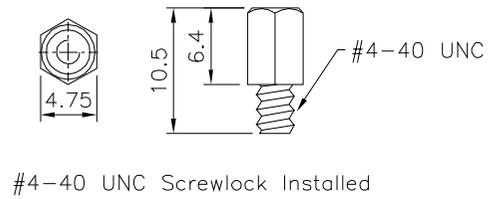
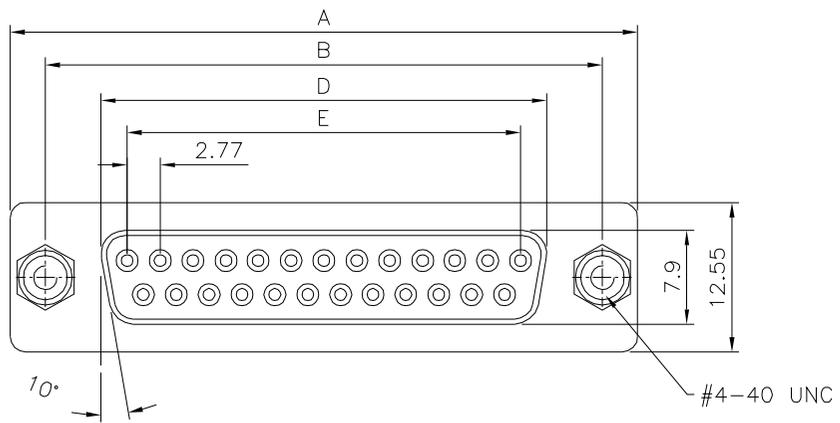


SPECIFICATION
 Current Rating:3A
 Voltage Rating:250V AC/RMS 60Hz
 Contact Resistance:20 Milliohms
 Insulation Resistance:1000 Megaohms At 500V DC
 Withstand Voltage:1000V AC/RMS 60Hz
 For 1 Minute
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Shell:Steel,Tin Plated Over Copper
 Boardlock:Brass,Tin Plated
 Screwlock:Steel,Nickel Plated
 RoHS Compliant

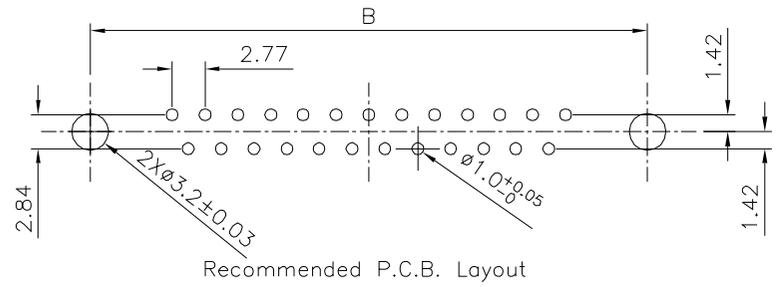

Pin	A	B	D	E
09	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.38 X.* ±3° .X ±0.25 .X* ±1.0° .XX ±0.13
14861		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	C0	UNIT
				mm

△	C0	NEW RELEASE	HZF	03/13/2025
NO.	REV.	REVISIONS	CHK	DATE