


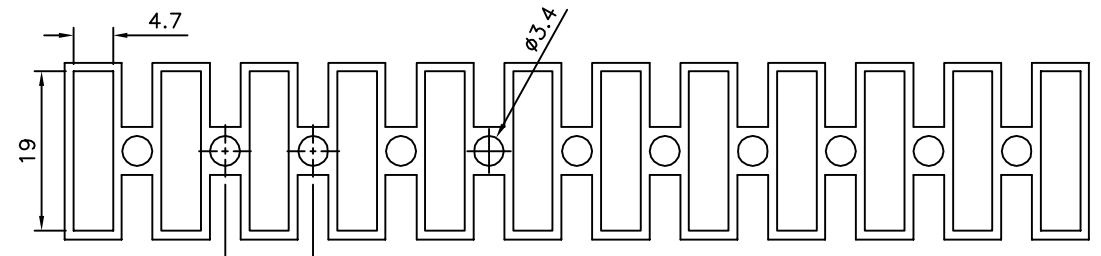
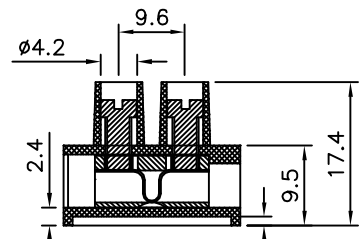
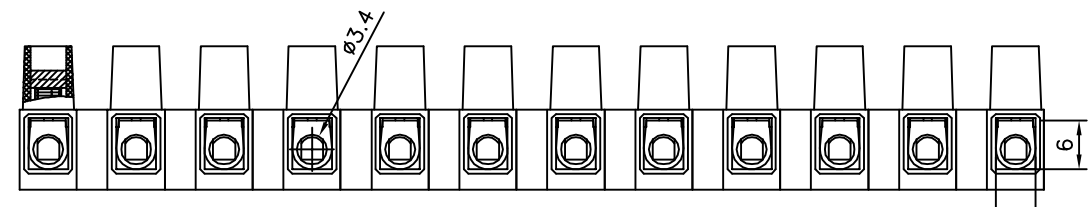



**△△ SPECIFICATION**  
 Base:With H-Shaped Base  
 Temperature Range:-20°C~+150°C  
 Insulator:PA66(UL94V-2),Nature  
 Conductor:Brass  
 Screw:M3X6,Carbonize-Steel,Zinc Plated  
 Wire Protector:Stainless Steel  
 Wire Range:Cross-Sec:6mm<sup>2</sup>  
 RoHS Compliant

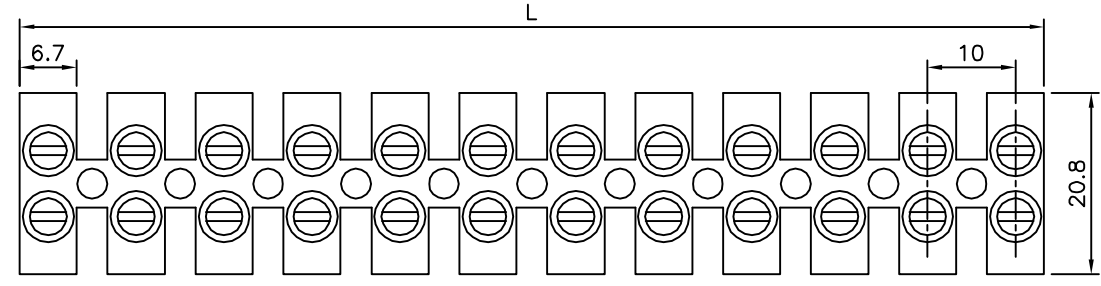

△△	L	1P	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P
		6.7	16.8	27	37.2	47.4	57.6	67.8	78	88.2	98.4	108.5	118.5

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ Housing ±0.5 △ Metal ±0.2
14871		EMILY		
		CHECKED BY HZF		
		DRAWING BY SONG		UNIT mm
SCALE	NONE	REV.	B2	

NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	03/12/2014
△	B1	Modify Data	HZF	03/22/2012
△	B0	NEW RELEASE	HZF	11/22/2008