


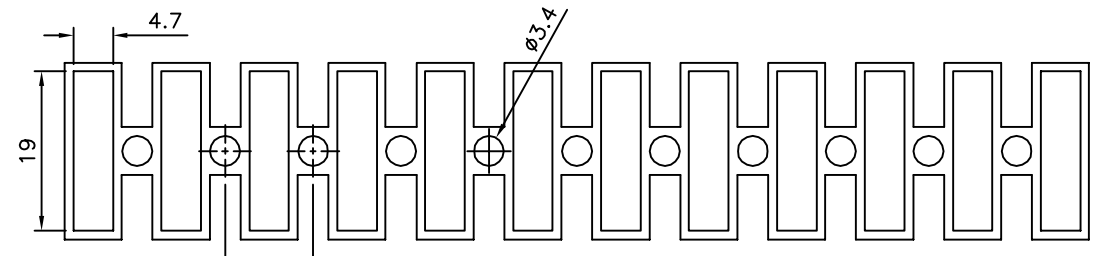
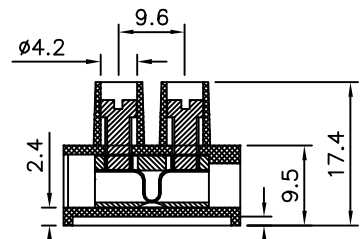
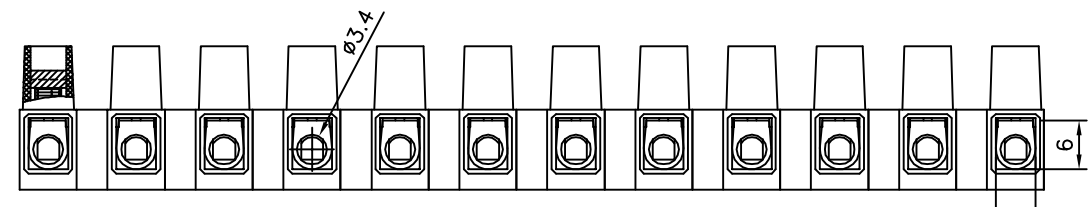



△△ SPECIFICATION
 Base:With H-Shaped Base
 Temperature Range:-20°C~+150°C
 Insulator:PA66(UL94V-2),Nature
 Conductor:Brass
 Screw:M3X6,Carbonize-Steel,Zinc Plated
 Wire Protector:Stainless Steel
 Wire Range:Cross-Sec:6mm²
 RoHS Compliant

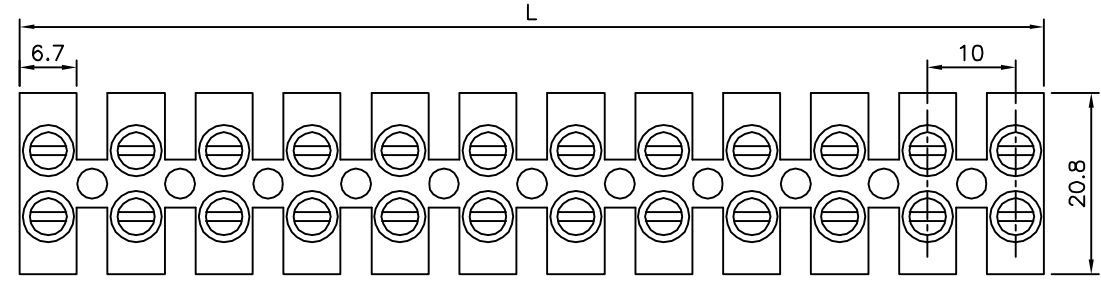

△△	L	1P	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P
		6.7	16.8	27	37.2	47.4	57.6	67.8	78	88.2	98.4	108.5	118.5

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ Housing ±0.5 △ Metal ±0.2
14873		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	B2	

NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	03/12/2014
△	B1	Modify Data	HZF	03/22/2012
△	B0	NEW RELEASE	HZF	11/22/2008