File No. 182EA14226 SHEET 1/1

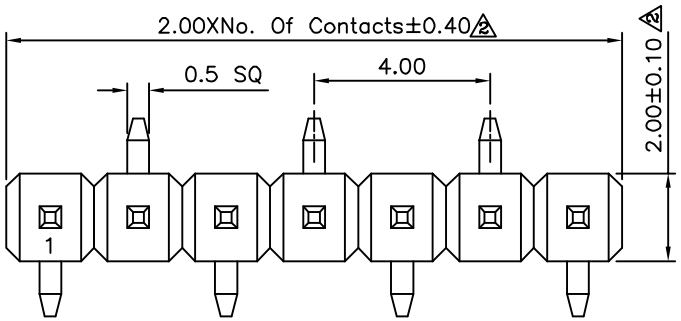

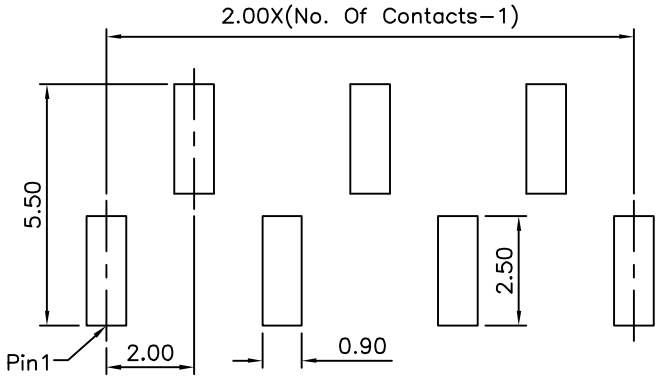

1 Recommended P.C.B. Layout

2 1 SPECIFICATION

Current:1A
Dielectric Strength:1000V AC Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:−55°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Copper Alloys,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

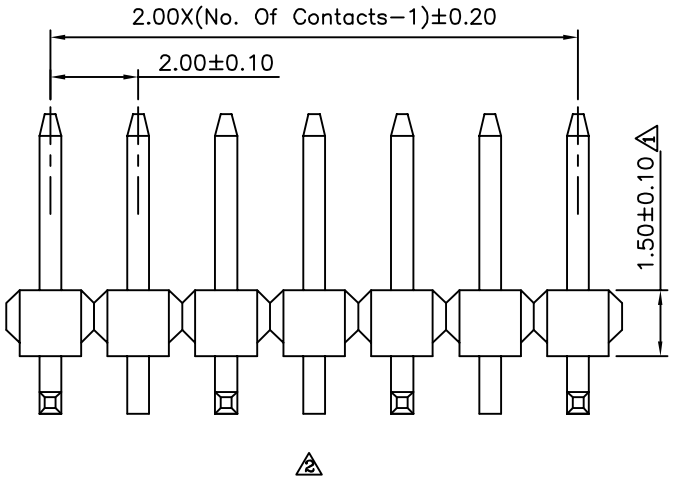

2

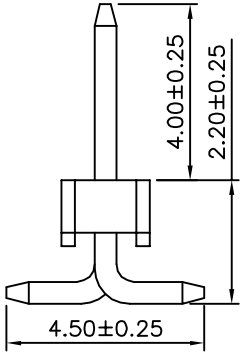

1 2

3	A3	Modify Data	HZF	01/14/2014
2	A2	Modify Data	HZF	12/18/2012
1	A1	Modify Data	HZF	09/03/2009
0	A0	NEW RELEASE	SHIN	04/15/2007
NO.	REV.	REVISIONS	CHK	DATE

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	15001	APPROVED BY	EMILY
		CHECKED BY	HZF
		DRAWING BY	YBL
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG. ±5°
UNIT mm