

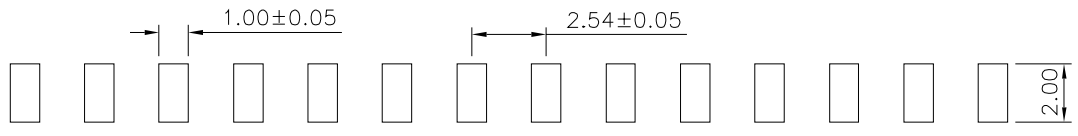


SPECIFICATION

Current Rating:3A
 Δ Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

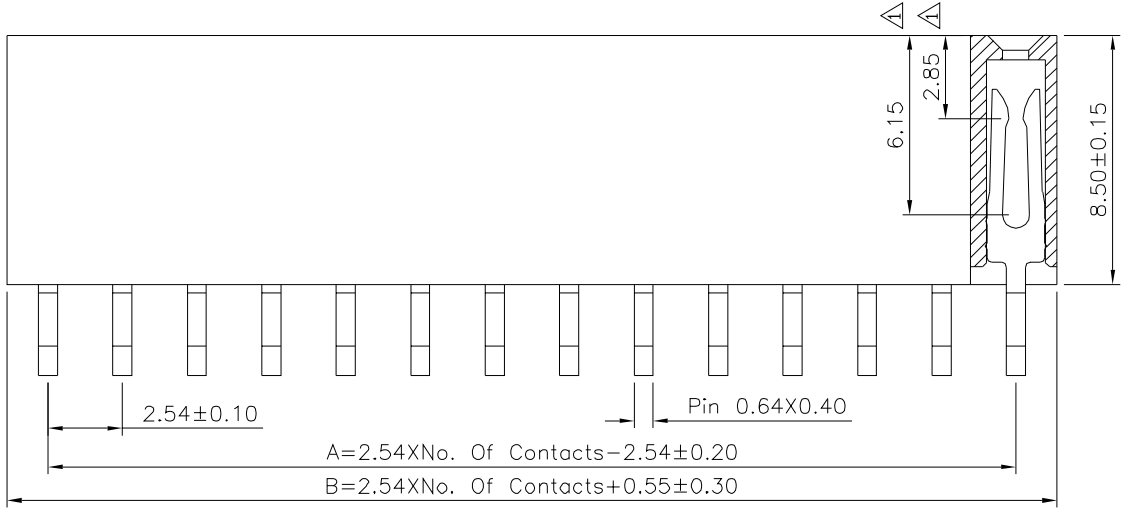

Recommended P.C.B. Layout
 Tolerance:±0.05

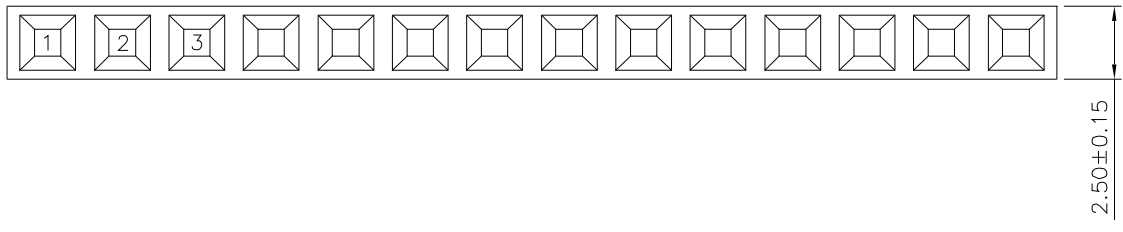

Pin	A	B	Pin	A	B
02	2.54	5.63	22	53.34	56.43
03	5.08	8.17	23	55.88	58.97
04	7.62	10.71	24	58.42	61.51
05	10.16	13.25	25	60.96	64.05
06	12.70	15.79	26	63.50	66.59
07	15.24	18.33	27	66.04	69.13
08	17.78	20.87	28	68.58	71.67
09	20.32	23.41	29	71.12	74.21
10	22.86	25.95	30	73.66	76.75
11	25.40	28.49	31	76.20	79.29
12	27.94	31.03	32	78.74	81.83
13	30.48	33.57	33	81.28	84.37
14	33.02	36.11	34	83.82	86.91
15	35.56	38.65	35	86.36	89.45
16	38.10	41.19	36	88.90	91.99
17	40.64	43.73	37	91.44	94.53
18	43.18	46.27	38	93.98	97.07
19	45.72	48.81	39	96.52	99.61
20	48.26	51.35	40	99.06	102.15
21	50.80	53.89			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
15116		EMILY	
		CHECKED BY	
		HZF	
DRAWING BY		HAO	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
Δ A1		Modify Data	HZF	10/08/2024
Δ A0		NEW RELEASE	HZF	04/29/2014