
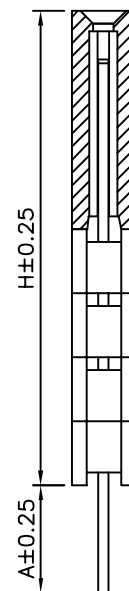
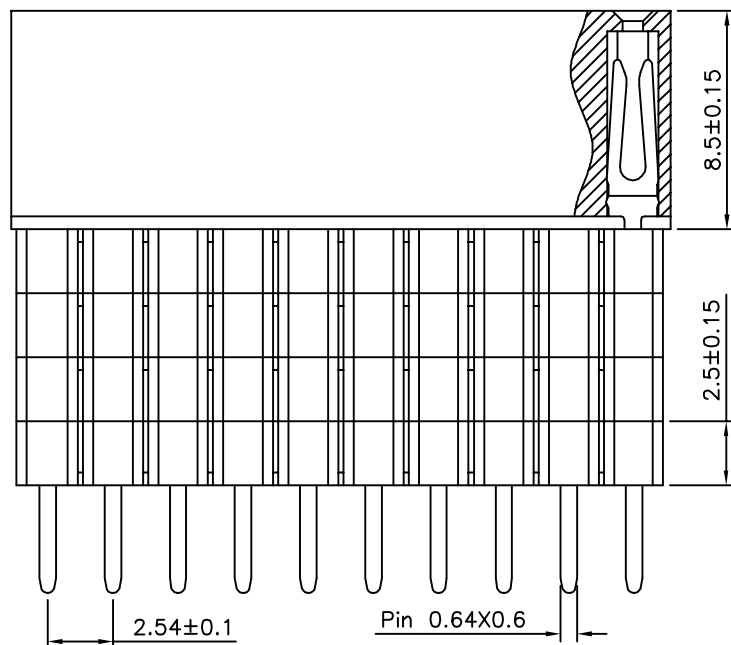


Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance  $\pm 0.05$ )

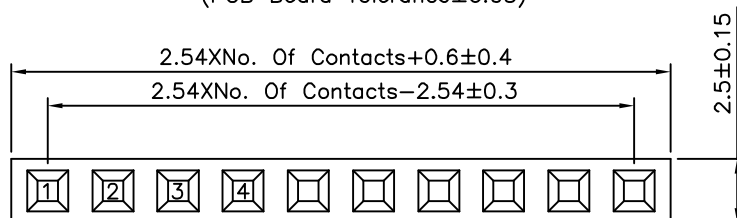

# SPECIFICATION

Current Rating:3A  
Withstand Voltage:1000V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

| Series No. | Plastic Q'ty | H     | A     |
|------------|--------------|-------|-------|
| 0196       | 1            | 11.00 | 2.30  |
| 0196       | 1            | 11.00 | 7.00  |
| 0196       | 1            | 11.00 | 12.30 |
| 0197       | 2            | 13.50 | 4.50  |
| 0197       | 2            | 13.50 | 9.80  |
| 0198       | 3            | 16.00 | 2.00  |
| 0198       | 3            | 16.00 | 7.30  |
| 0199       | 4            | 18.50 | 4.80  |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

15234

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

X.  $\pm 0.25$  X.  $\pm 0.25$   
.X  $\pm 0.20$  .X  $\pm 0.25$   
.XX  $\pm 0.15$  .XX  $\pm 0.15$   
.XXX  $\pm 0.10$  .XXX  $\pm 0.10$

UNIT  
mm



NO. REV.

NEW RELEASE  
REVISIONS

CHK

DATE  
12/11/2014