File No.	697PC28806	SHEET	1/1

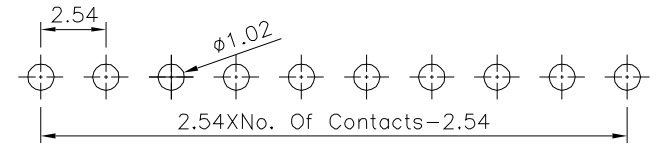

Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance±0.05)

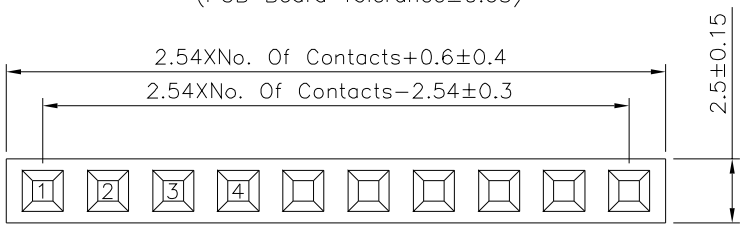

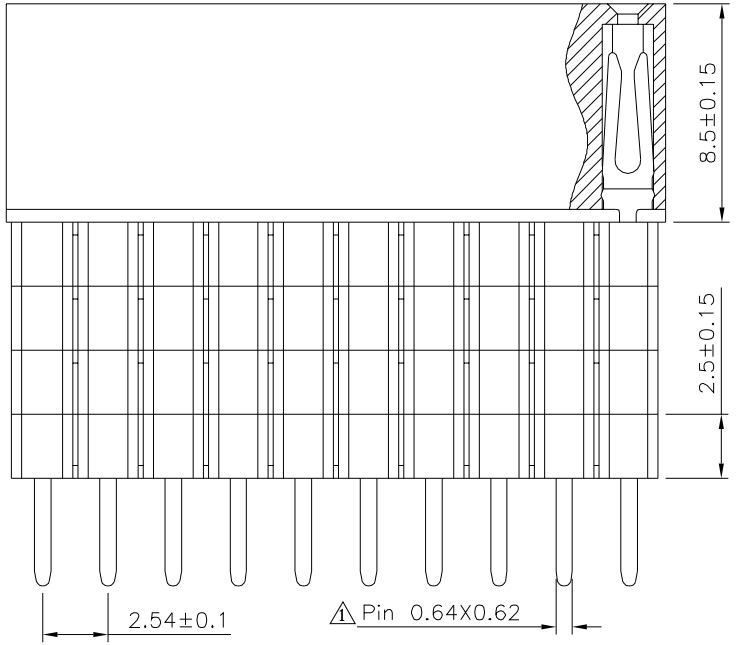

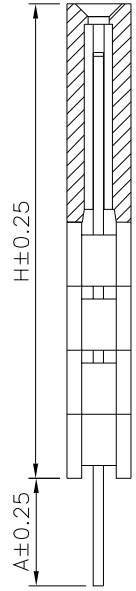

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:−40°C~+105°C
1 Insulator:PA9T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	15296	APPROVED BY	EMILY
		CHECKED BY	HZF
		DRAWING BY	HAO
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 1

X. ±0.30 X.° ±2°
.X ±0.25 .X° ±1.5°
.XX ±0.20 .XX° ±1°
.XXX ±0.15 .XXX° ±0.5°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	03/28/2025
0	A0	NEW RELEASE	HZF	12/11/2014