

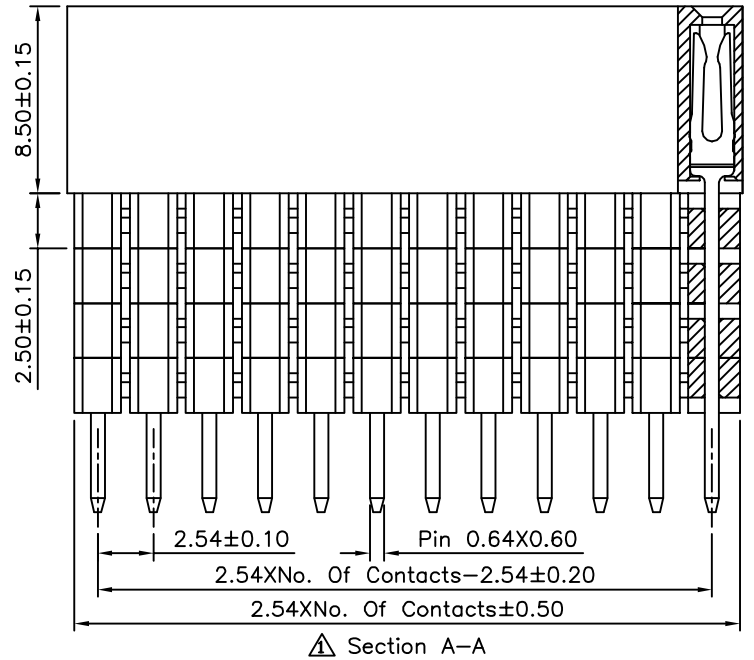


Recommended P.C.B. Layout (Top Side)
(PCB Board Tolerance ±0.05)

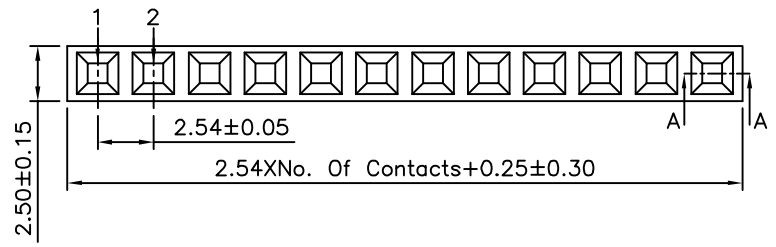

Section A-A

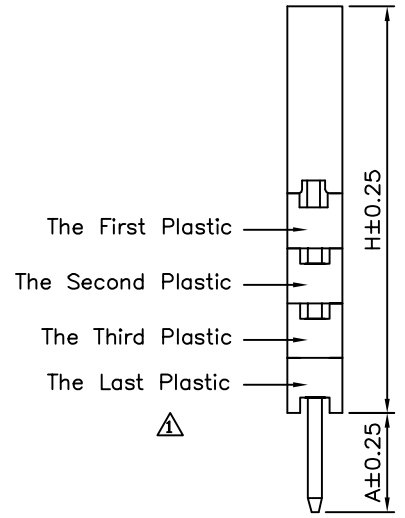

SPECIFICATION

- Current Rating: 3.0 Amp
- Withstand Voltage: 1000V AC/DC
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megaohms Min.
- Operation Temperature: -40°C ~ +105°C
- Contact: Brass, Gold Plated Over Nickel
- Insulator: PBT+30%G.F.(UL94V-0), Black
- RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.67	4.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
15330		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	B1	NO. REV.

△ B1	Modify Data	HZF	10/22/2012
△ B0	NEW RELEASE	HZF	05/23/2012
NO. REV.	REVISIONS	CHK	DATE