




Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance±0.05)

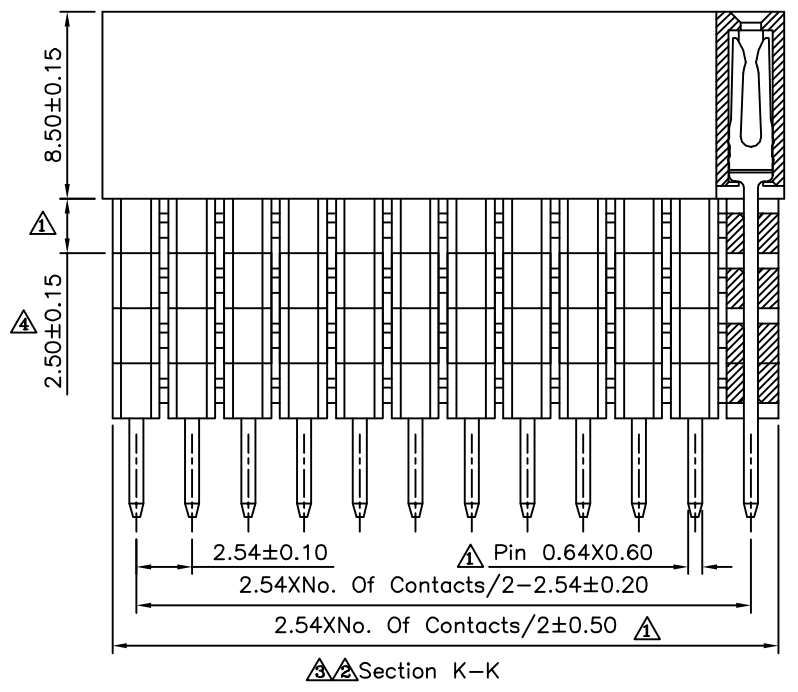

**△ SPECIFICATION**  
 Current Rating:3.0 Amp  
 △ Withstand Voltage:1000V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 RoHS Compliant

△△ Series No.	Plastic Q'ty	H	A △
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.67	4.60

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
15432		EMILY		
		CHECKED BY HZF		
		DRAWING BY SONG		UNIT mm
SCALE	NONE	REV.	A4	

NO.	REV.	REVISIONS	CHK	DATE
△ A4		Modify Data	HZF	10/23/2012
△ A3		Modify Data	HZF	06/07/2012
△ A2		Modify Data	HZF	02/17/2011
△ A1		UPDATE DIMENSION	HZF	04/15/2008
△ A0		NEW RELEASE	SHIN	09/02/2007