
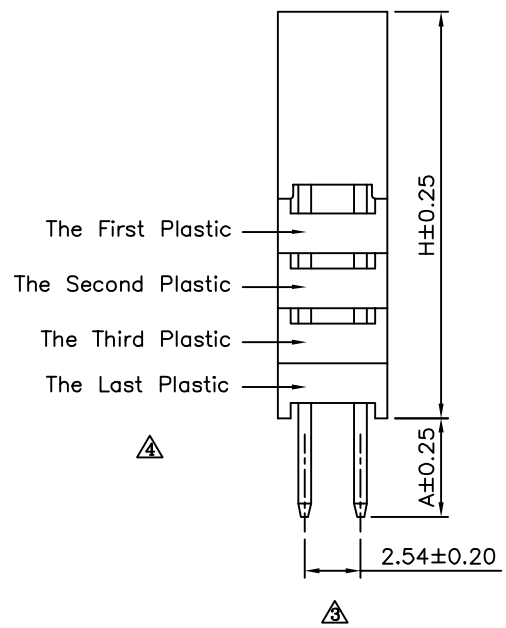
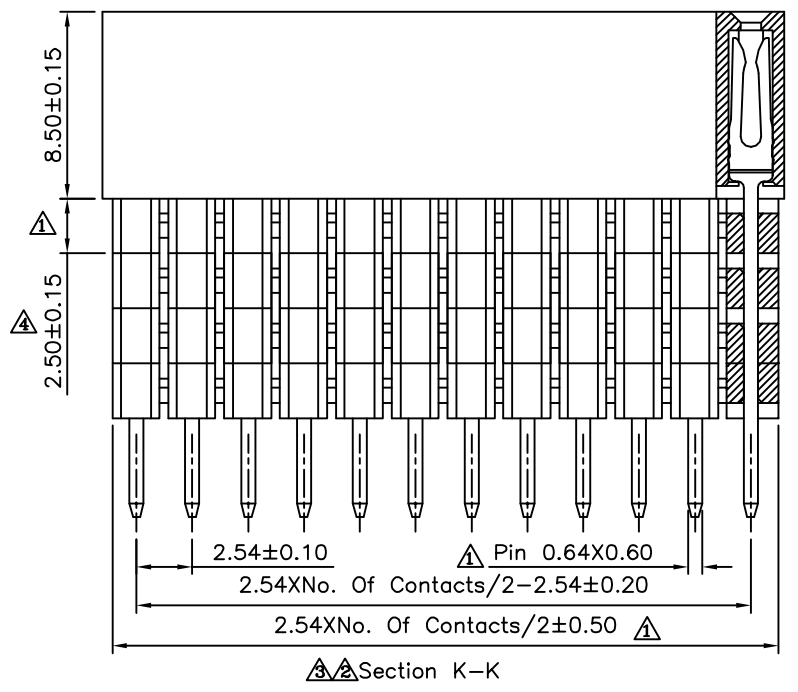


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

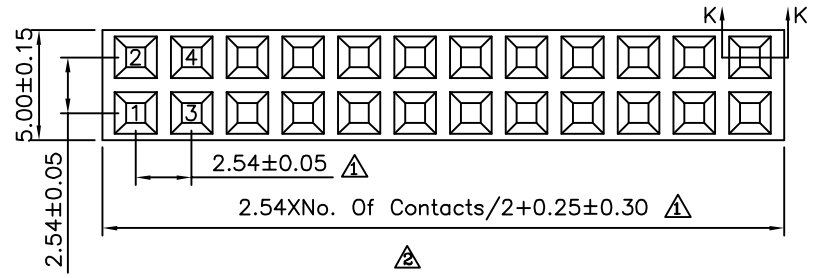

△ SPECIFICATION
 Current Rating:3.0 Amp
 △ Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

| △△ Series No. | Plastic Q'ty | H | A △ |
|---------------|--------------|-------|------|
| 0196 | 1 | 11.05 | 2.30 |
| 0196 | 1 | 11.05 | 7.35 |
| 0196 | 1 | 11.05 | 12.2 |
| 0197 | 2 | 13.59 | 4.85 |
| 0197 | 2 | 13.59 | 9.65 |
| 0198 | 3 | 16.13 | 2.30 |
| 0198 | 3 | 16.13 | 7.10 |
| 0199 | 4 | 18.67 | 4.60 |

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-----------------|----|----------------------------------------------------------------------------------------------|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3° |
| 15433 | | EMILY | | |
| | | CHECKED BY HZF | | |
| | | DRAWING BY SONG | | UNIT mm |
| SCALE | NONE | REV. | A4 | |

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|------------------|------|------------|
| △ A4 | | Modify Data | HZF | 10/23/2012 |
| △ A3 | | Modify Data | HZF | 06/07/2012 |
| △ A2 | | Modify Data | HZF | 02/17/2011 |
| △ A1 | | UPDATE DIMENSION | HZF | 04/15/2008 |
| △ A0 | | NEW RELEASE | SHIN | 09/02/2007 |