

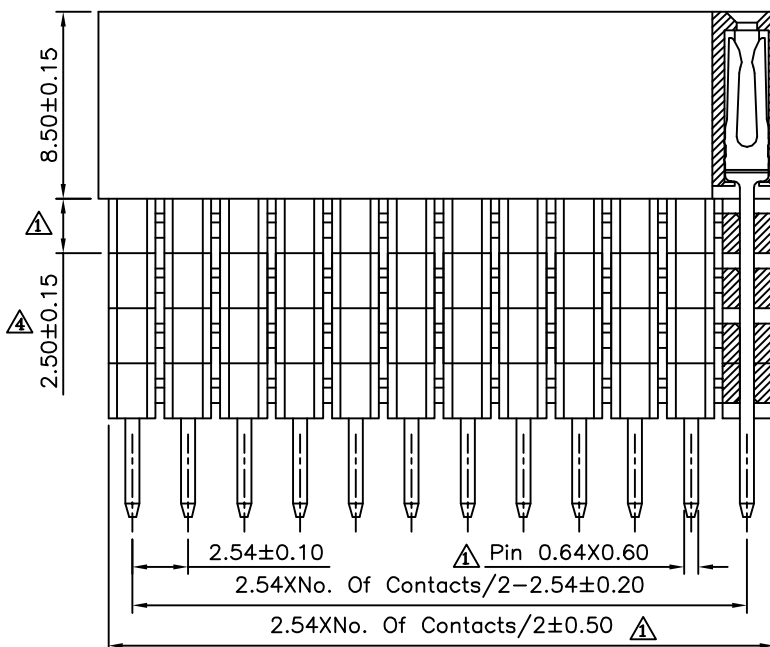


Recommended P.C.B. Layout (Top Side)
(PCB Board Tolerance ± 0.05)

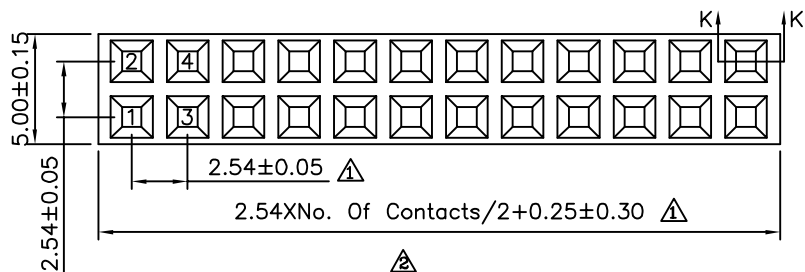

Section K-K

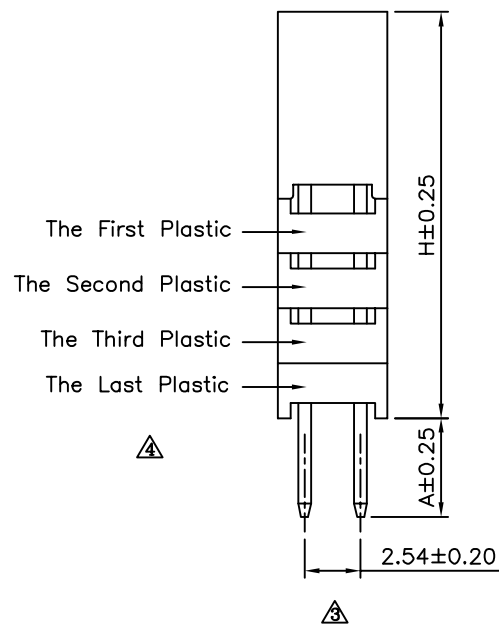

SPECIFICATION

- Current Rating: 3.0 Amp
- Withstand Voltage: 1000V AC/DC
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megaohms Min.
- Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact: Brass, Gold Plated Over Nickel
- Insulator: PBT+30%G.F.(UL94V-0), Black
- RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.67	4.60

DRAWING No.

15442

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^{\circ}$

UNIT mm



NO. REV.

A4

Modify Data

A3

Modify Data

A2

Modify Data

A1

UPDATE DIMENSION

A0

NEW RELEASE

HZF

10/23/2012

HZF

06/07/2012

HZF

02/17/2011

HZF

04/15/2008

SHIN

09/02/2007

CHK

DATE

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.