


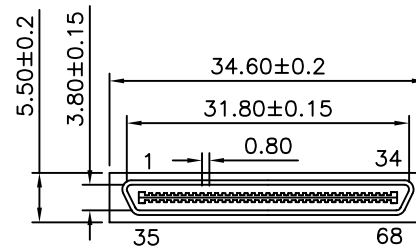



Wire Holder  
(2 Places)






**SPECIFICATIONS**

Contact Current Rating:1 Amp  
 Dielectric Withstanding Voltage:250V AC  
 Insulation Resistance:500Megohms Min  
 Contact Resistance:35Milliohms Max  
 Operation Temperature:-55°C ~ +105°C  
 Housing And Cover:PBT+ Glass Fiber UL94V-0,Black  
 Contacts:Phosphor Bronze  
                   Selective Gold Plated  
 Shell:Steel  
                   Nickel Plated Over Copper

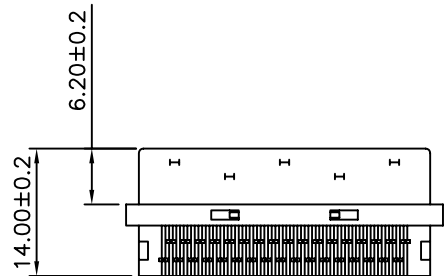

Termination Cover  
(2 Places)

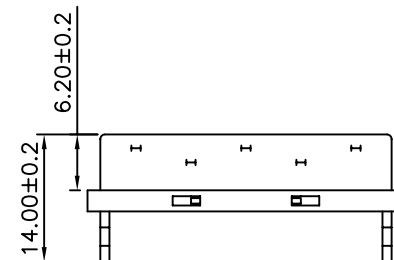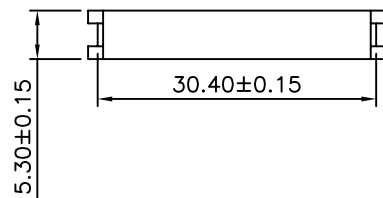

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

15676

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

JLT

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG:


SCALE

NONE

REV.

A0

UNIT  
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

02/23/2007

DATE