

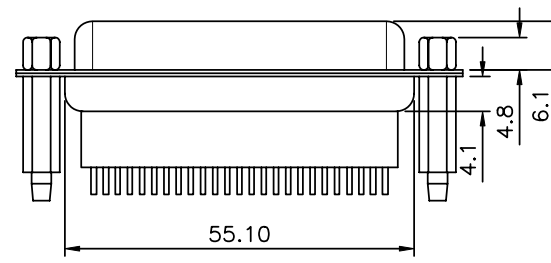
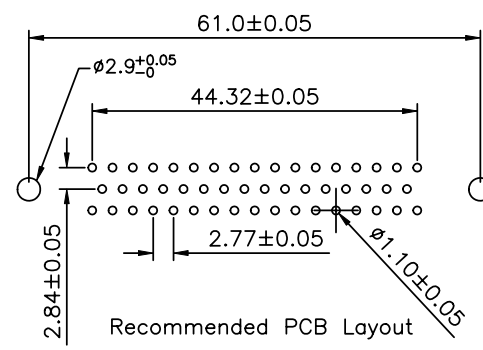
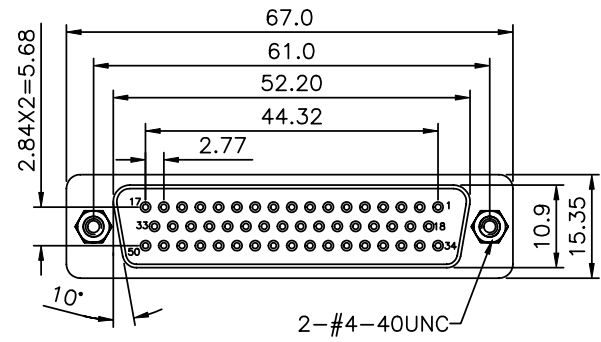



SPECIFICATION

Current Rating:3Amp
 Voltage Rating:250V AC/RMS 60Hz
 Dielectric Withstanding Voltage:1000V AC/RMS
 60Hz For One Minute
 Contact Resistance:20 Milliohms Max. At 3Amp DC
 Insulation Resistance:1000 Megohms At 500V DC
 Insulator:Glass-Filled Thermoplastic PBT(UL94V-0)
 Contact:Brass,Gold Flash
 Shell:Steel,Tin Plated Over Copper
 Clinch Nut:Brass,Nickel Plated
 Boardlock:Brass,Tin Plated
 Screwlock:Brass,Nickel Plated
 RoHS Compliant

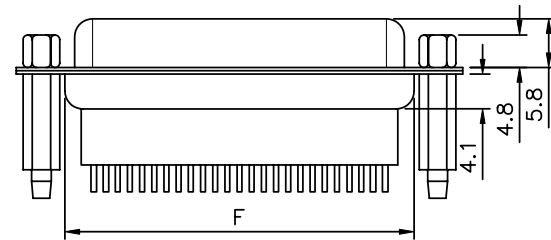

Pin	A	B	D	E	F
9	30.81	24.99	16.33	11.08	19.20
15	39.20	33.30	24.70	19.39	27.70
25	53.05	47.04	38.40	33.24	41.10
37	69.40	63.50	54.80	49.86	57.30

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 15730

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY XYH

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X ±0.38
 .X ±0.25
 .XX ±0.13
 X* ±3°
 X* ±1.0°

SCALE NONE

REV. BO

UNIT mm

BO NEW RELEASE HZF 05/20/2009
 NO.REV. REVISIONS CHK DATE