
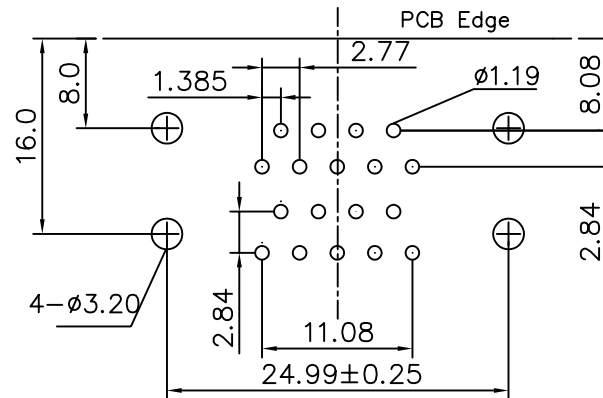
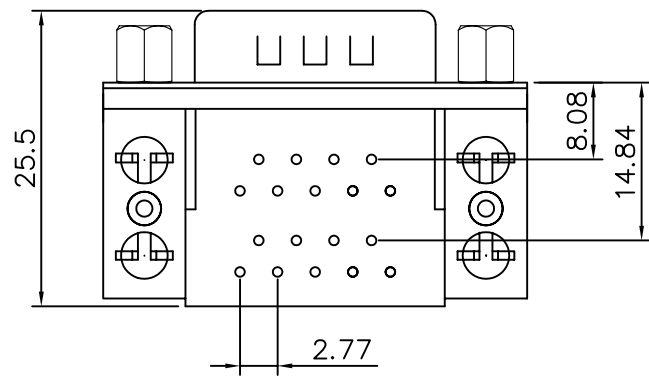
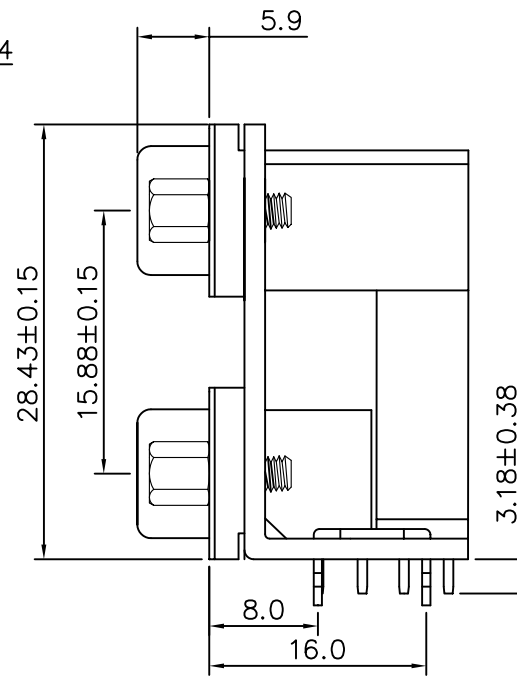


**SPECIFICATIONS**

Current Rating: 5 AMP  
 Dielectric Withstanding Voltage: 1000V Per Minute  
 Insulation Resistance: 1000 Megohms Min At 500V DC  
 Contact Resistance: 15 Milliohms Max. 10Sec  
 Operating Temperature: -55°C ~ +105°C  
 Insulator: PBT+30% Glass Fiber (UL 94V-0), Black  
 Contact: Brass,  
     Gold Flash On Mating End  
     Tin-Lead On Termination End  
     With Entire Contact Nickel Unperplated  
 Shell: Steel, Nickel Plated

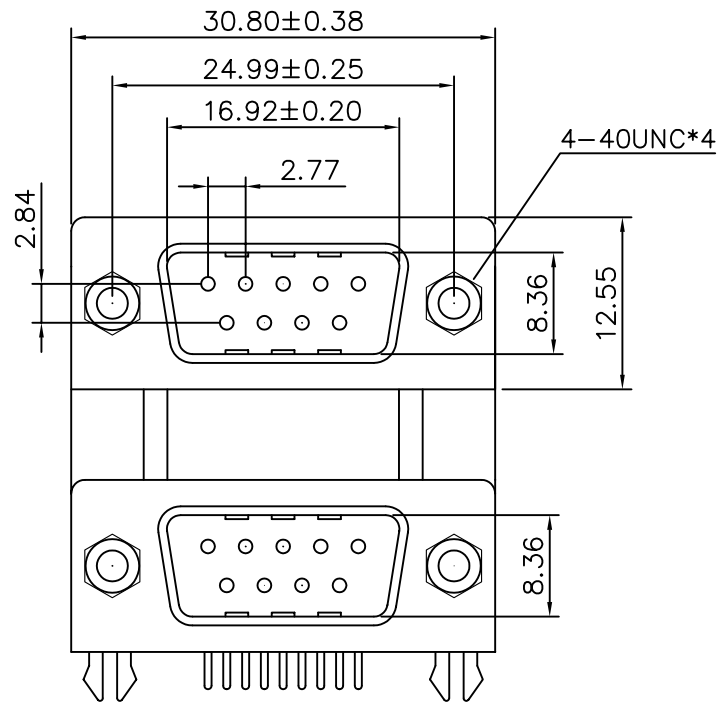

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

15735

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.25

.XX ±0.15

ANG. ±2°

SCALE

NONE

REV.

A0

UNIT  
mm



NO. REV.

△ A0 NEW RELEASE

REVISIONS

BECKY

CHK

DATE