

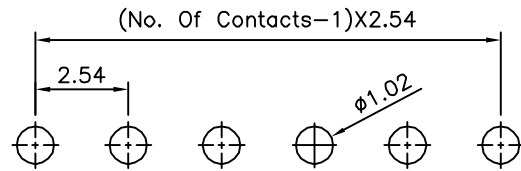
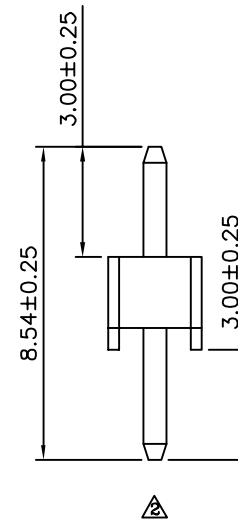


△ SPECIFICATION
 Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Black
 △Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

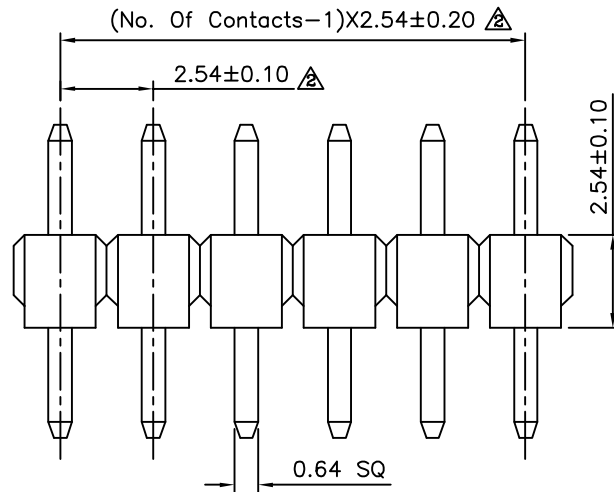

Recommended P.C.B Layout

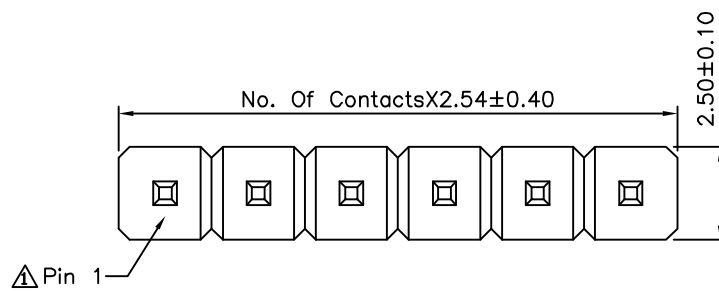

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15758

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△A2	Modify Data	HZF	09/18/2014	
△A1	Modify Data	HZF	04/16/2011	
△A0	NEW RELEASE	EMILY	04/02/2008	