
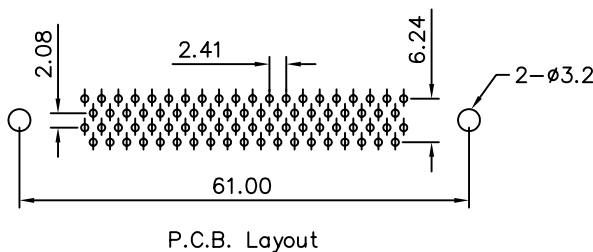

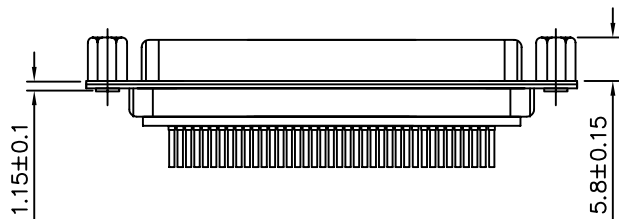


SPECIFICATIONS

Insulator: P.B.T UL 94V-0 Rated
 Contact: Copper Alloy, t=0.20mm
 Gold Flashed 1u", 3u", 5u", 10u", 15u", 30u"
 Shell: Cold Rolled Steel, t=0.40mm
 Nickel, Tin Or Gold Plated
 Current Rating: 1 A Max.
 Dielectric Withstanding Voltage: 500 VAC For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Total Mating Force: 10.0 Kgf Max.
 Total Unmating Force: 6.0 Kgf Min.
 Temperature Range: -55°C~+105°C

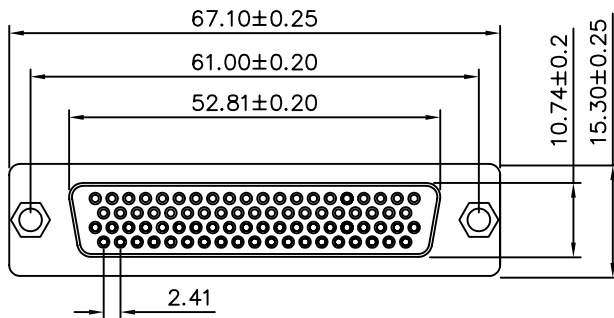

8	Hex Screw	2	Copper Alloy	H5*10	Nickel Plated
7	Boardlock Nut	2	Copper Alloy	H4.75*11.5	Nickel Plated
6	8.0 Nut	2	Copper Alloy	H4.75*8.0	Nickel Plated
5	3B Nut	2	Copper Alloy	H4.75*4.75	Nickel Plated
4	Back-Shell	1	Cold Rolled Steel	T=040mm	Tin Plated
3	Front-Shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	78	Copper Alloy	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94V-0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15773

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.3


.XX ±0.20

ANG. ±1°

SCALE NONE

REV. A0

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

BECKY

2004/10/01

CHK

DATE