

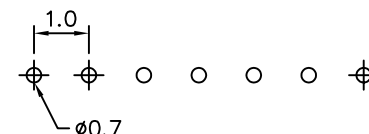
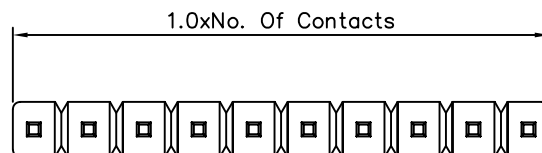


SPEICIFICATIONS

Current Rating: 1 Amp
 Withstanding Voltage: AC 500V RMS
 Insulation Resistance: 5000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Operation Temperature: -40°C To +105°C
 Insulator: Thermoplastic UL 94V-0
 Contact: Copper Alloy
 Contacts: 2~50

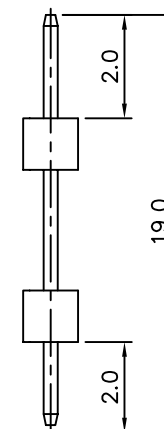

P.C.B. Layout

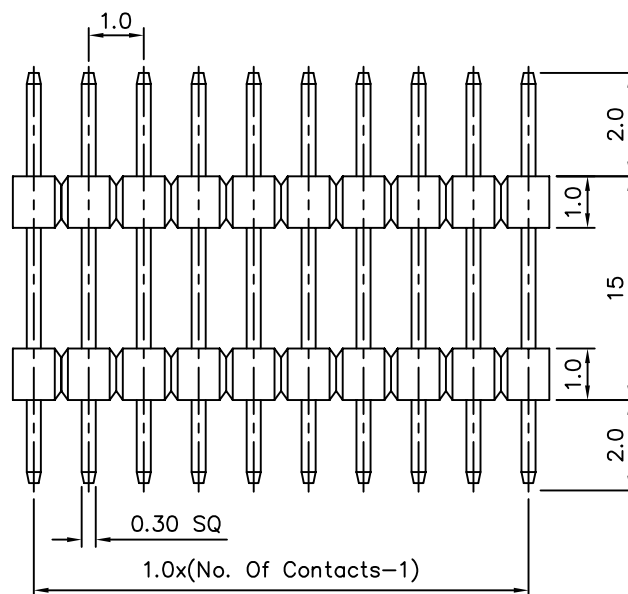

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15779

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°


SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

NEW RELEASE
 REVISIONS

BECKY
 CHK

06/15/2005
 DATE