
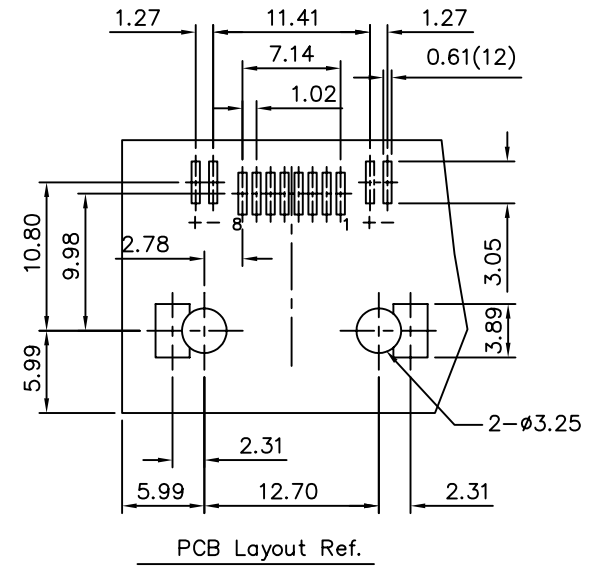
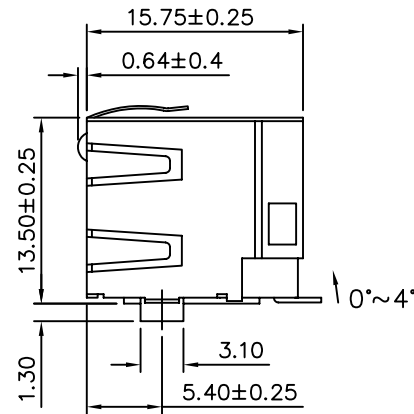


SPECIFICATIONS

Housing: DSM Stanyl TE250F6(Nylon 46)
Heat Deflection Temp. 290°C,Black Color,
UL 94V-0
Contact: 0.35mm Thick Phos-Bronze
Gold Plated 6u" And Gold Flash In
Solder Area
Shield: 0.25mm Thick Copper Alloy,Nickel Plated

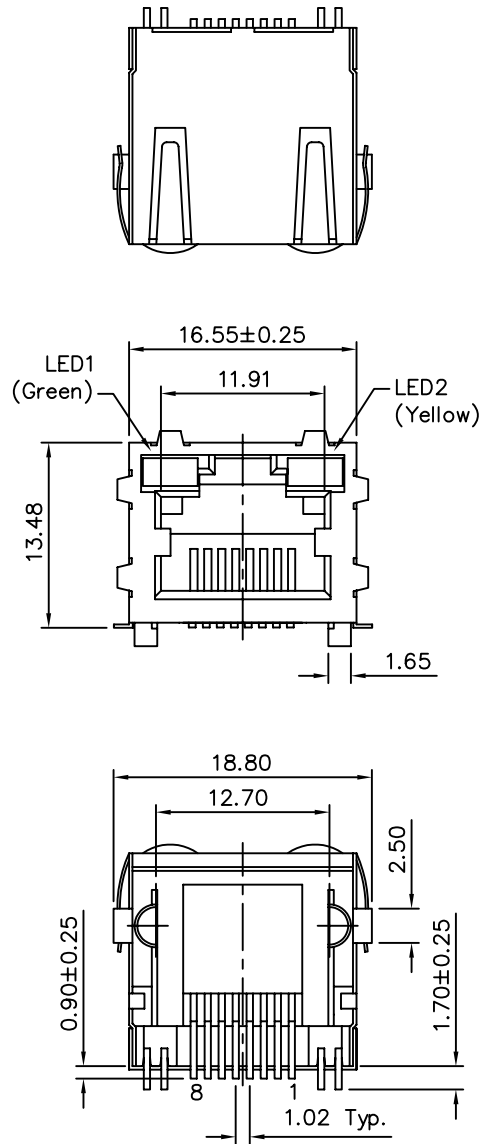

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15820

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.20

.XXX ±0.10

UNIT
mm



NO. REV.

A0

NEW RELEASE

REVISIONS

BECKY

CHK

08/09/2005

DATE