

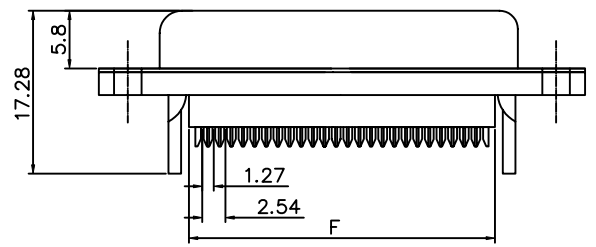
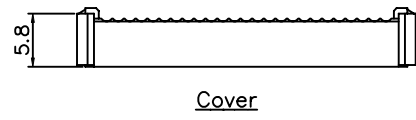
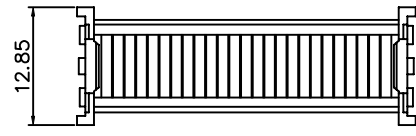


SPECIFICATIONS
 Current Rating: 3 AMP
 Voltage Rating: 250 VAC/rms 60Hz
 Contact Resistance: 20 Milliohms
 Max At 1 AMP DC.
 Insulation Resistance: 1000 Megohm
 At 500 V DC
 Dielectric Withstanding Voltage:
 1000 VAC/rms 60Hz For 1 Minute
 Insulator: Glass-Filled Thermoplastic PBT, UL94V-0
 Contact: Copper alloy
 Shell: Steel, Tin Over Copper
 RoHS Compliant

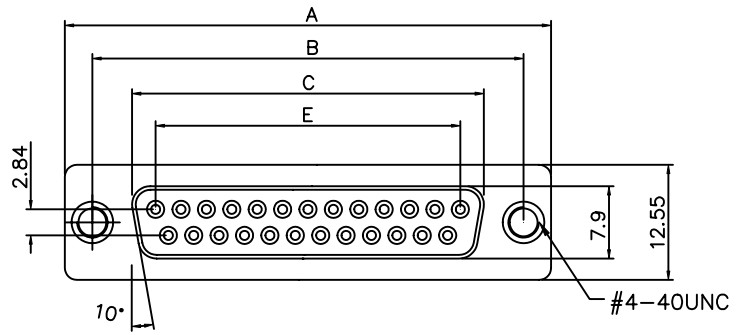

With Insulator Support

Strain Relief

Positions	A	B	C	E	F
9	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.70	19.39	17.78
25	53.05	47.04	38.40	33.24	30.48
37	69.40	63.50	54.80	49.86	45.72

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.38 X* ±3° .X ±0.25 .X* ±1.0° .XX ±0.13
16114		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		PEGA		
		BO		
SCALE	NONE	REV.	BO	UNIT

NO.	REV.	REVISIONS	CHK	DATE
△	BO	NEW RELEASE	HZF	05/13/2008